




CITY OF CORAL GABLES

COMPREHENSIVE CITYWIDE SEPTIC TO SEWER CONVERSION PLAN

Informational Community Meeting
Pine Bay and Kings Bay



Agenda



- 1 Introduction
- 2 Program Purpose
- 3 Background
- 4 Proposed Improvements
- 5 Estimated Costs and Funding
- 6 Status, Schedule and Resources
- 7 Comments and Questions

Introduction



300 Engineering Group was contracted by the City of Coral Gables to develop a ***Comprehensive Citywide Septic to Sewer Conversion Assessment Plan***

This assessment plan will help the city begin the planning process to convert existing properties within the city from septic systems to sewer.

PROJECT TEAM



Program Purpose



Current Situation:

- 50% of properties within the City of Coral Gables is not connected to a centralized sewer system and is served by septic systems
- Many existing septic tanks are old, failing, and do not meet current construction standards

City Initiative:

- Planning a public sewer system to serve the entire City
- Eliminate non-point pollution sources



Benefits:

Water Quality Improvement:

- Enhances Miami-Dade watersheds
- Reduces pollutant loading to Biscayne Bay

Environmental Protection:


- Part of a countywide program to safeguard groundwater and natural systems by eliminating septic tanks

Legislative Requirement:

- Florida House Bill 1379, passed in 2023, requires that certain areas throughout Florida connect to a central sewer or upgrade to an enhanced nutrient-reducing septic tank by **July 1, 2030**. (Currently not applicable to South Florida).

City of Coral Gables Wastewater Infrastructure



- Existing Wastewater System:
 - 35 pump stations
 - 64 miles of gravity mains
 - 14 miles of force mains
 - Approximately 1,400 manholes
- Existing Septic Tank Systems:
 - Approximately 7,642

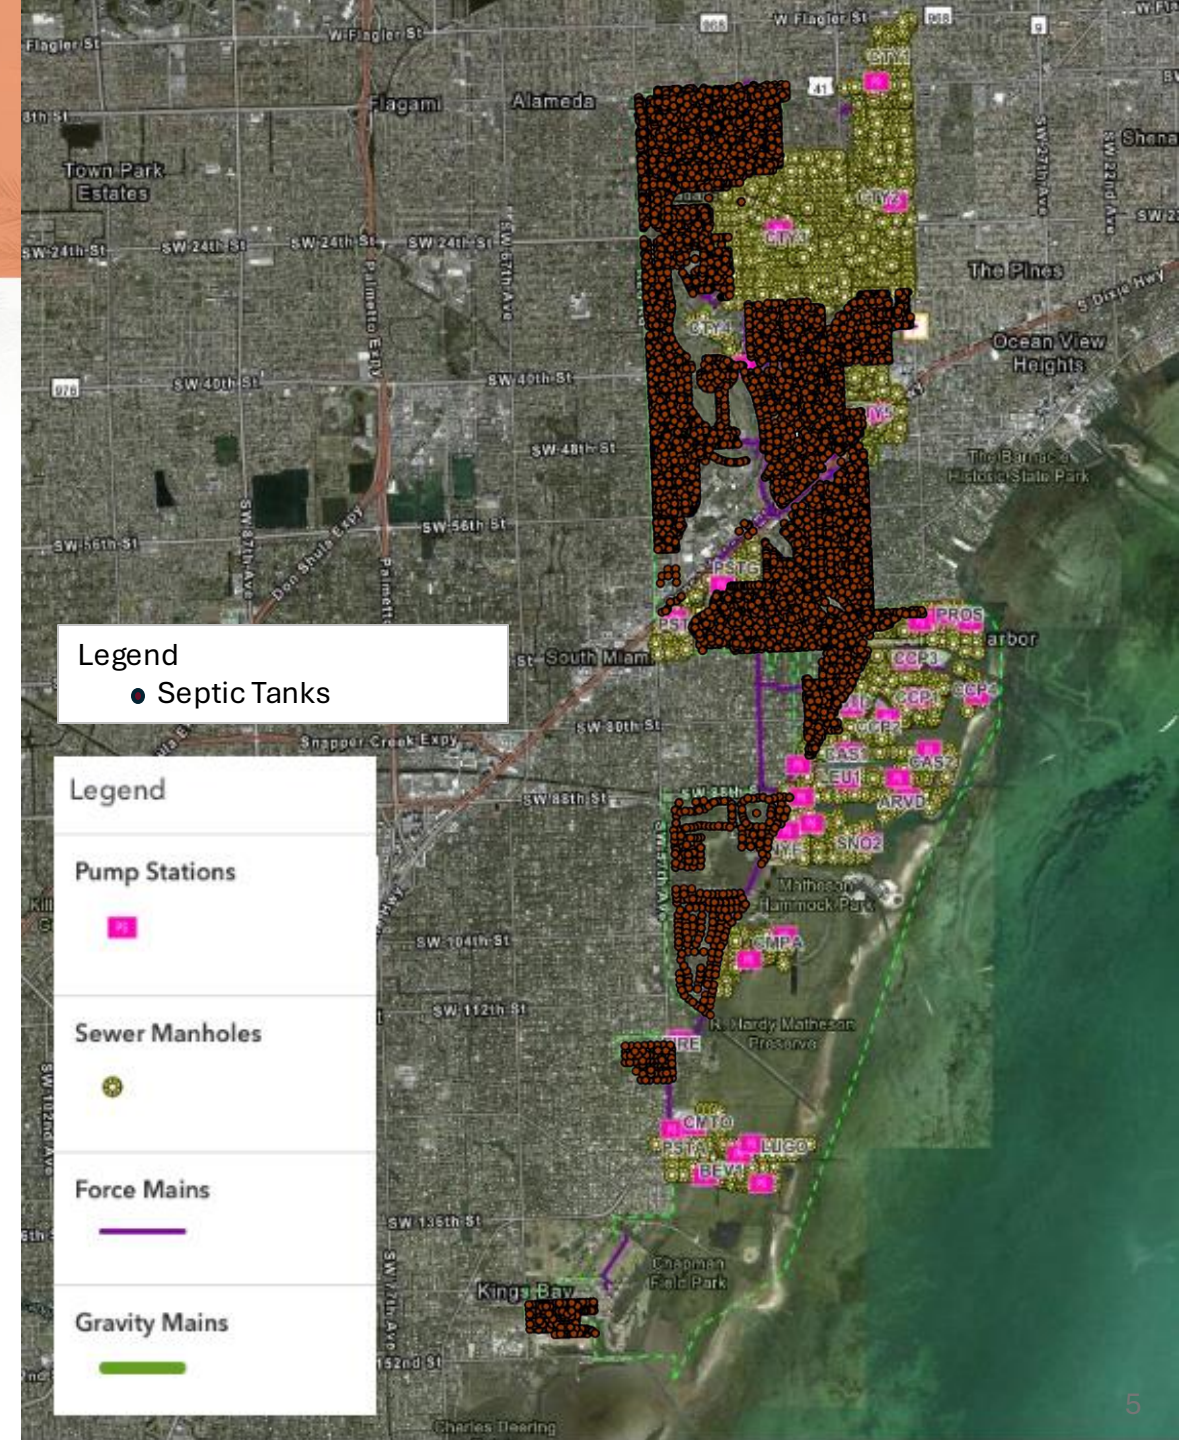




Sanitary Sewer System

Wastewater from homes and businesses flows through **sewer service laterals** into the City's wastewater system. From there, it travels through **gravity mains** towards **pump stations** which pressurize the flow and send it through **force mains** toward a **wastewater treatment facility** (for safe treatment & disposal)

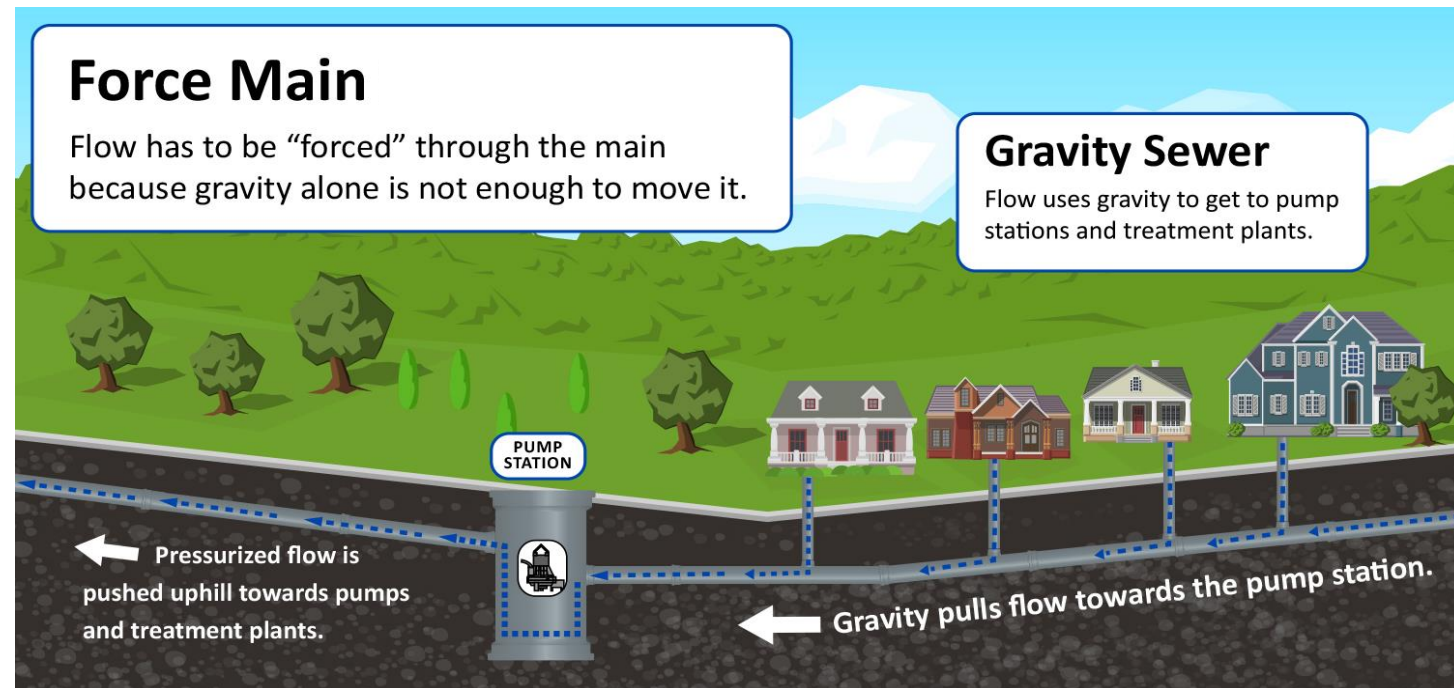
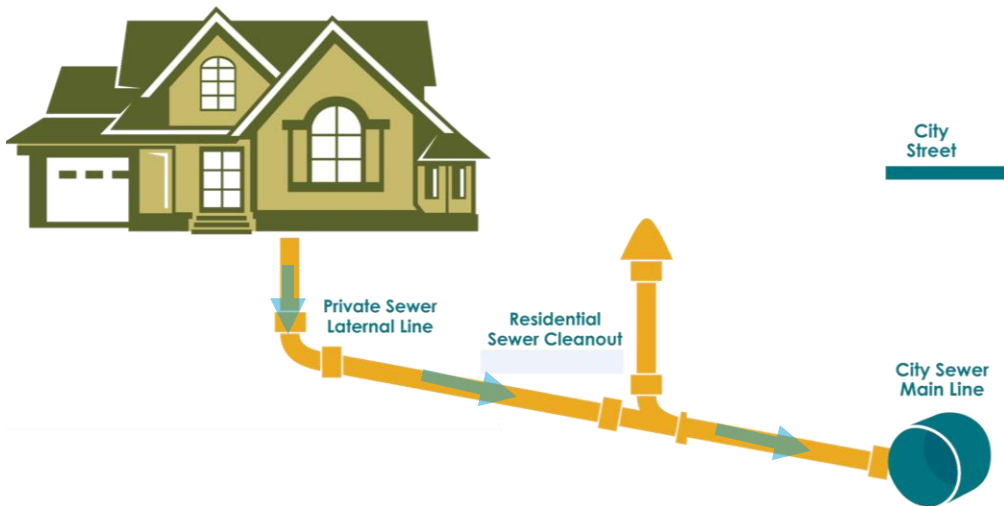


Onsite Sewage Treatment Systems (OSTS)

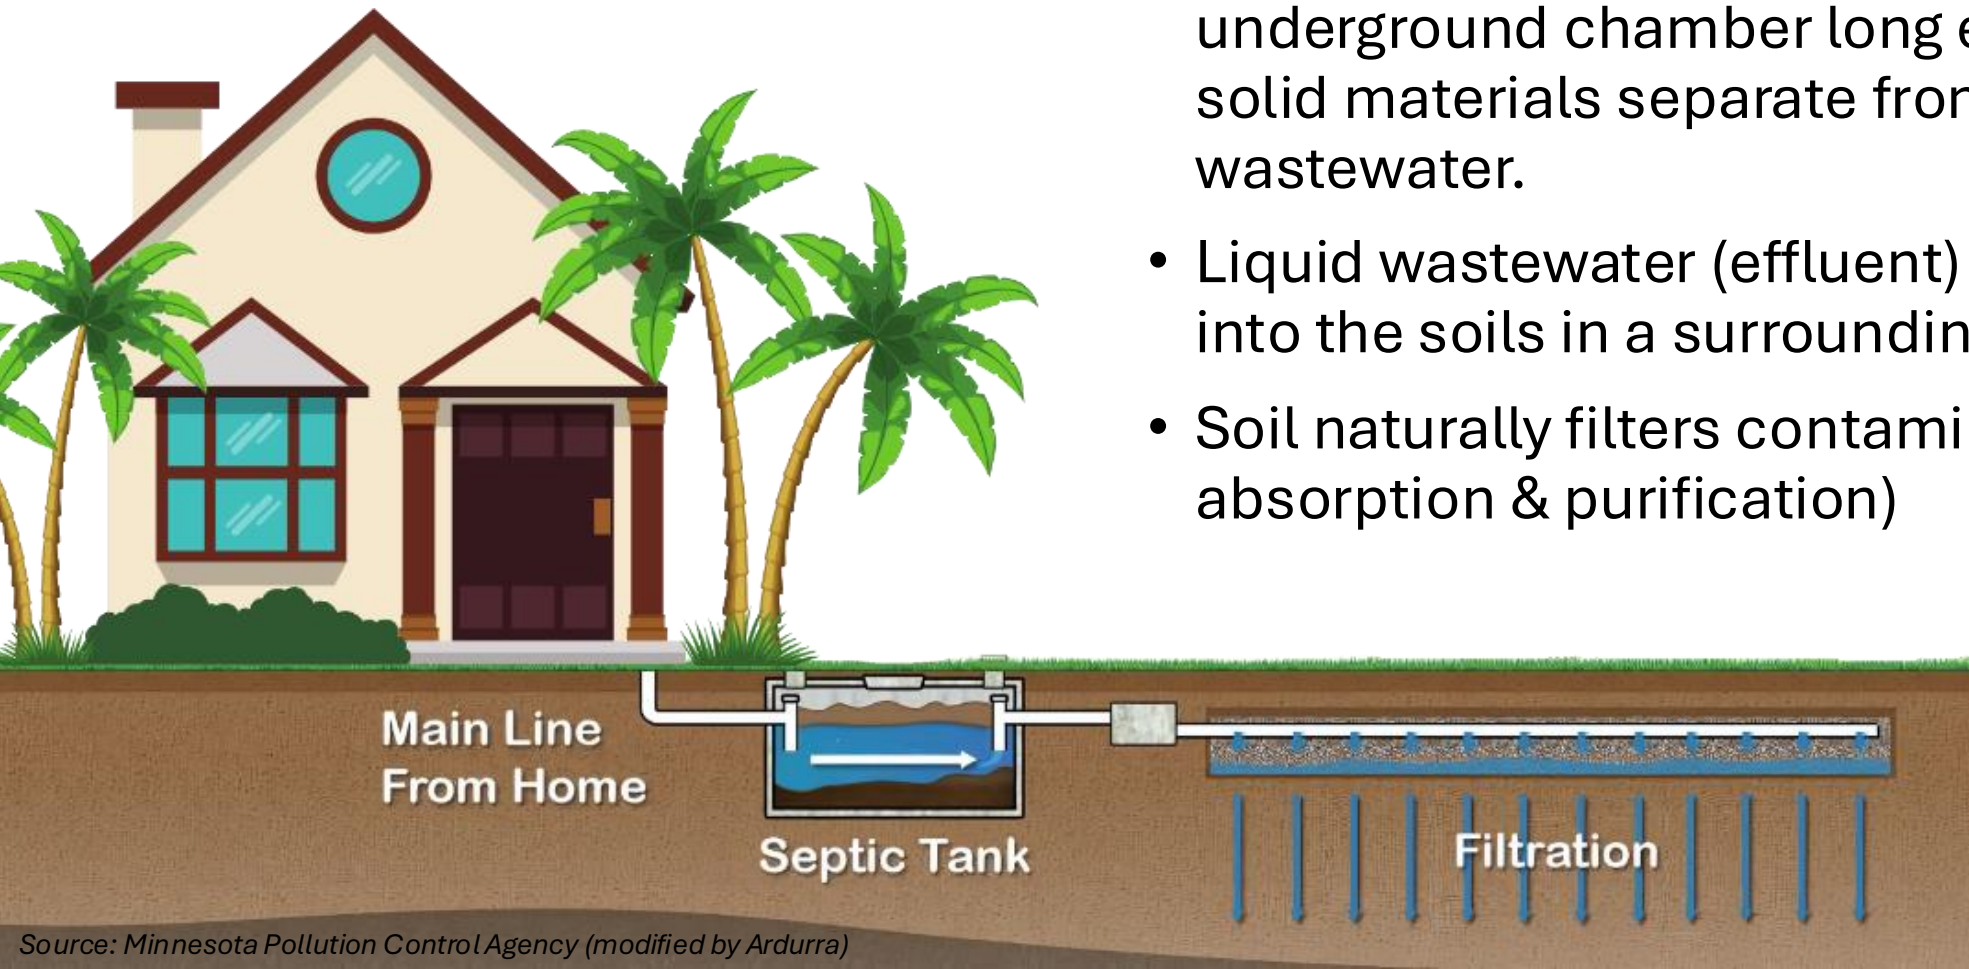

- Septic systems hold wastewater in an underground chamber long enough that the solid materials separate from the liquid wastewater.
- Liquid wastewater (effluent) gets discharged into the soils in a surrounding drain field
- Soil naturally filters contaminants (soil absorption & purification)


Nutrient and Pathogen Loading

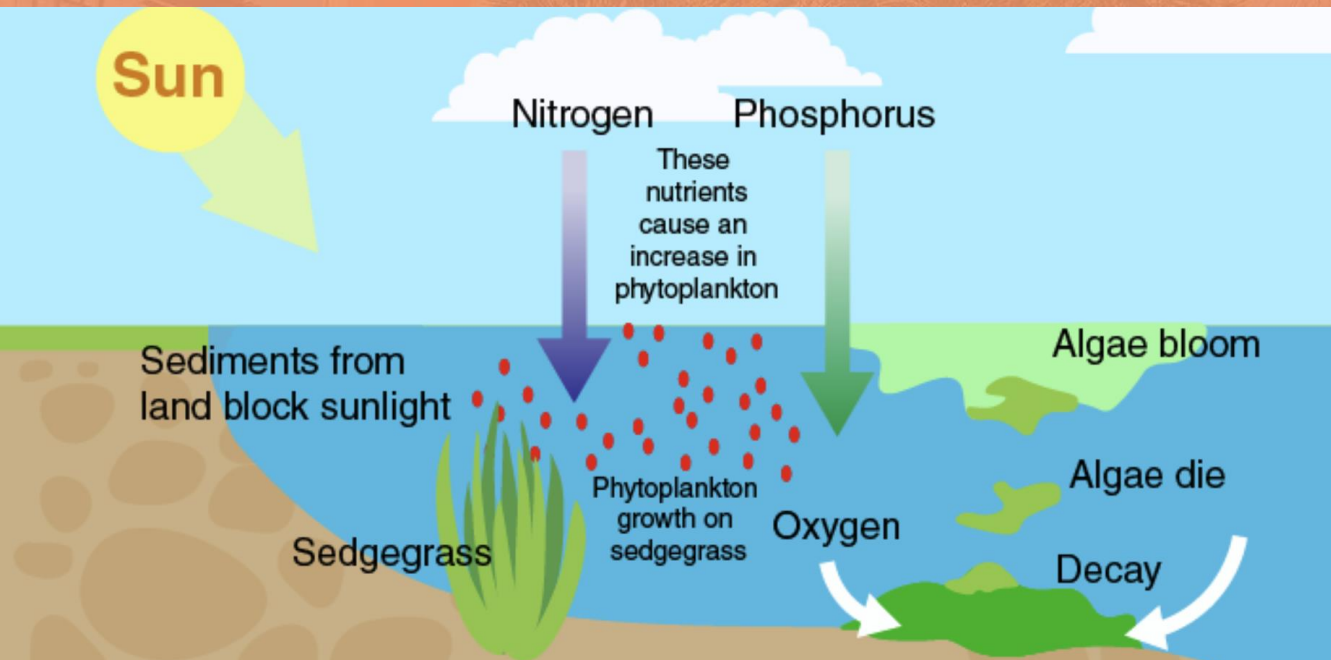

- Excessive nitrogen and phosphorus in surface waters, like Biscayne Bay, can lead to nutrient pollution, algal blooms, seagrass die-offs, harm to shellfish beds, fish kills, and more.
- Miami-Dade's marine habitats are essential to the local economy and tourism industry.



Increased Risk: Florida Septic Systems

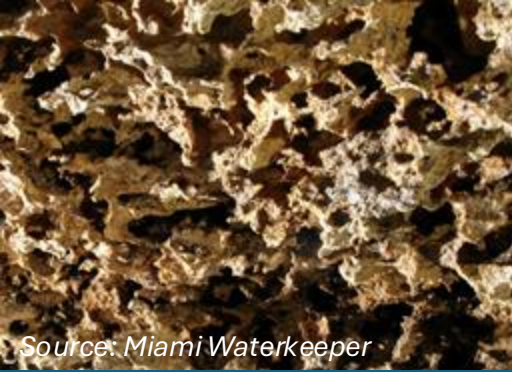


Limestone bedrock is porous and does not facilitate natural attenuation efficiently.

High water table provides less space/time for effluent to be filtered before it reaches the groundwater.




Flooding can cause septic tanks to overflow into nearby storm drains or back into residential pipes.

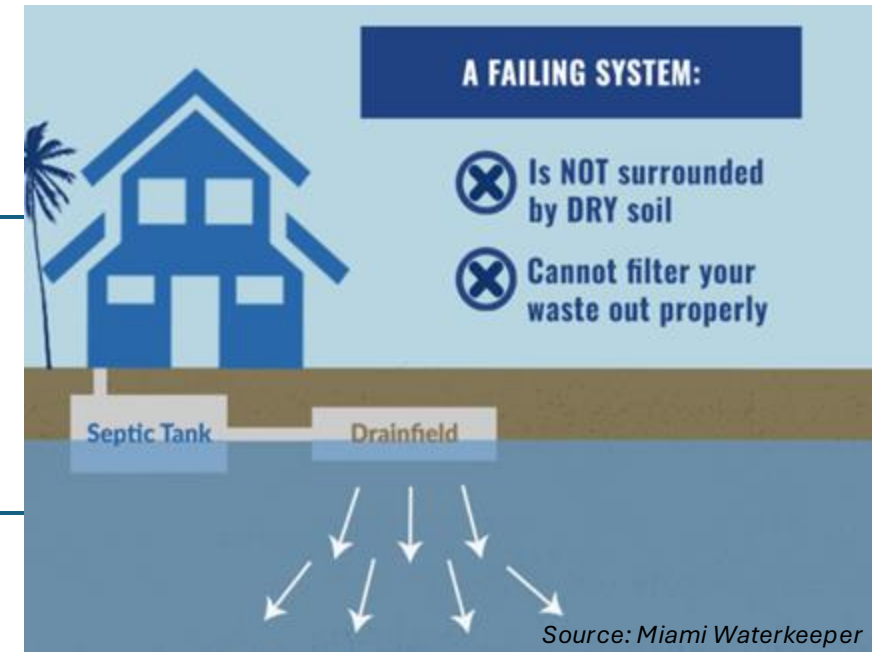

Source: Miami Waterkeeper



The Problem with Septic...

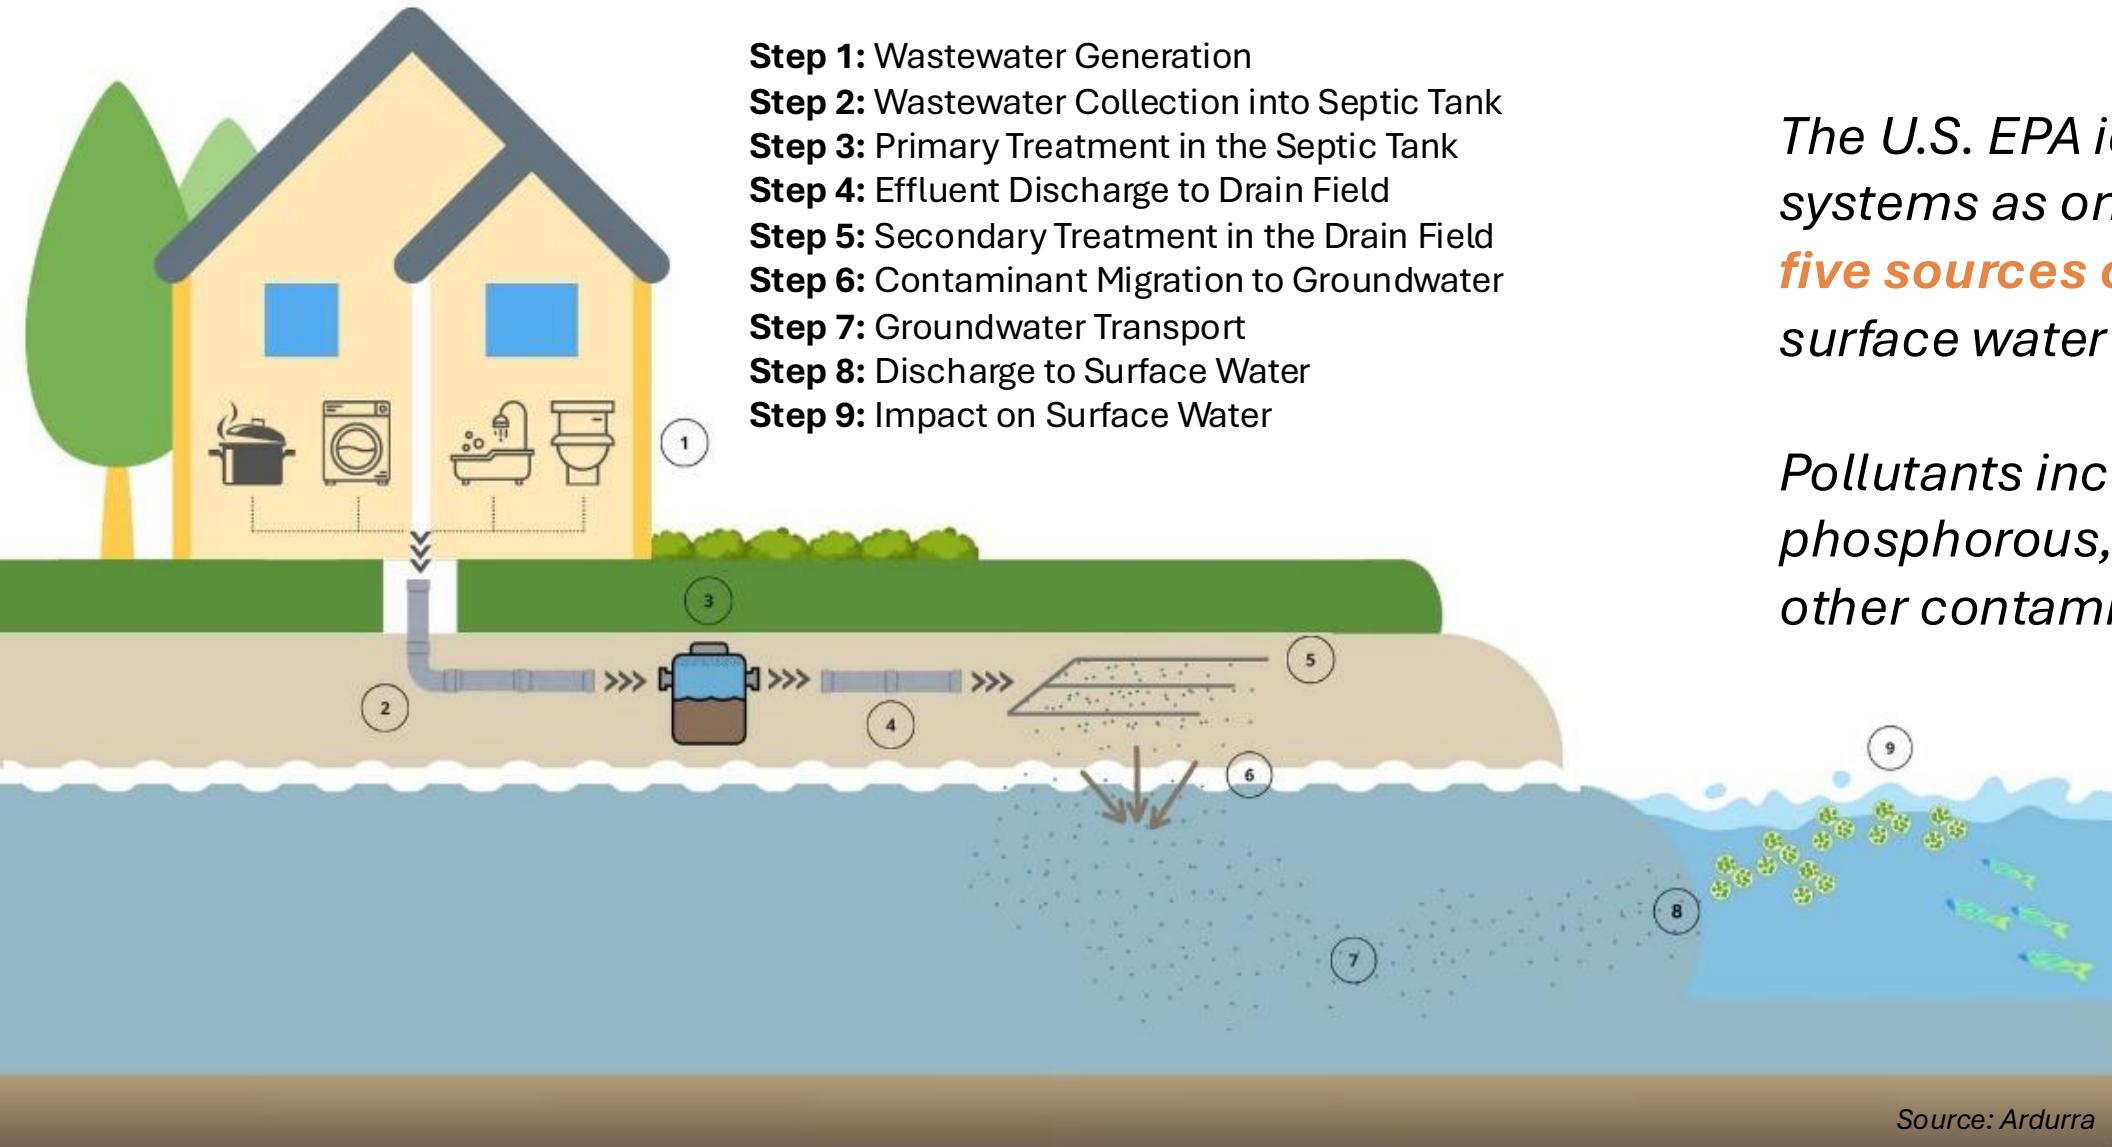

Step 1: Wastewater Generation

Step 2: Wastewater Collection into Septic Tank

Step 3: Primary Treatment in the Septic Tank

Step 4: Effluent Discharge to Drain Field

Step 5: Secondary Treatment in the Drain Field

Step 6: Contaminant Migration to Groundwater

Step 7: Groundwater Transport



Step 8: Discharge to Surface Water

Step 9: Impact on Surface Water

*The U.S. EPA identified septic systems as one of the **top five sources of pollution** in surface water bodies.*

Pollutants include phosphorous, nitrogen, and other contaminants.

Septic Tank Vulnerability

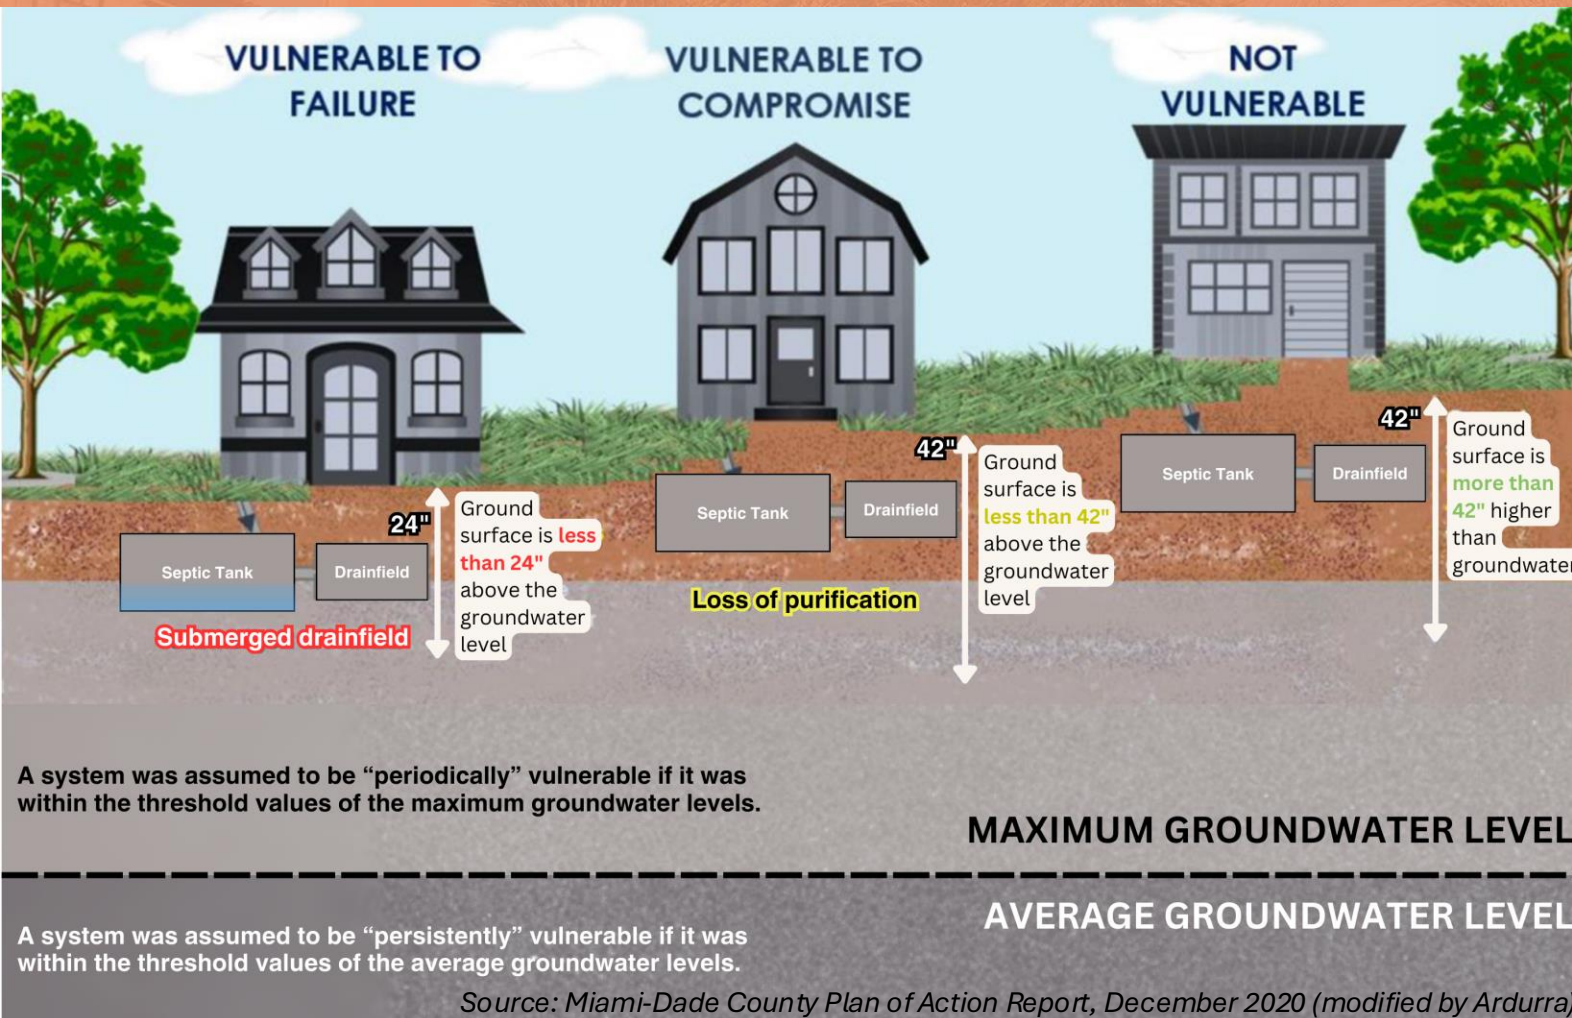


- Septic systems can pose public health **risks** and cause **negative impacts** on private properties and natural resources.
- Even when working properly, septic systems **continuously discharge nutrients** into ground and surface waters.
- Septic systems contribute an average of **700 pounds** of pollutant loading each day.
- **Sea level rise** increases septic tank vulnerability.

Typical Lateral Connection Sample

How connection is made:

Legend

- Exist. Manholes
- Prop. Clean Outs
- Prop. Lateral
- Private Lateral
- Exist. Gravity Mains
- Exist. Building
- Exist. Septic Tank (to be Abandoned)
- Parcels

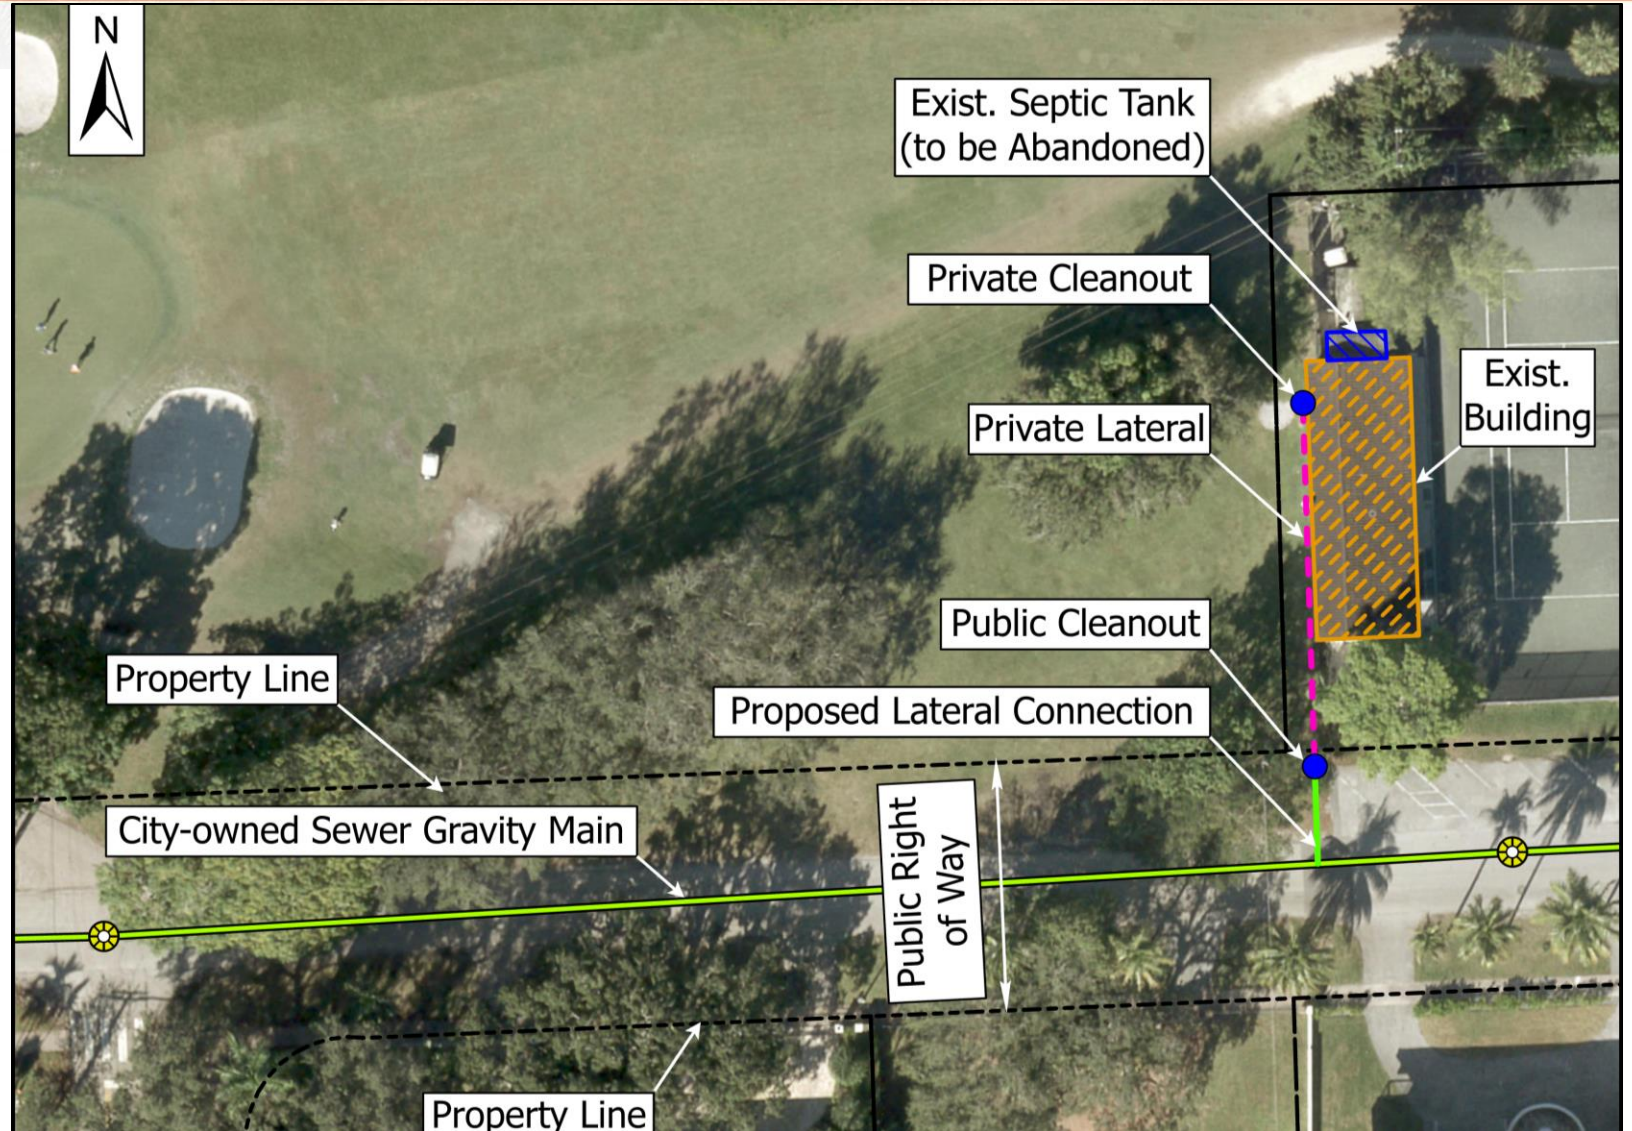


Sample Pump Station (PS) Layout



- The **city** will work closely with the community to develop appropriate screening and aesthetic enhancements for the proposed pump station, ensuring the design aligns with the character of each neighborhood.

State of Florida Rules



381.0065, Florida Statute

- Owner of **properly functioning** onsite sewage treatment and disposal systems (**OSTDS**) must connect to public system **within 365 days** of notification that the system is operational.
- Owner of **improperly functioning OSTDS** must connect to public system **within 90 days** of notification that the system is operational.



- Permits required from the Florida Department of Health (FDOH) before constructing, repairing, modifying, abandoning, or operating an OSTDS. This ensures that **all systems meet state standards and are appropriately designed for their specific locations.**
- Only registered contractors are authorized to construct, modify, alter, repair, service, abandon, or maintain any part of an OSTDS.

Miami-Dade County: Connect 2 Protect




- Multi-year, countywide initiative to extend the county's sanitary sewer service to residents using septic systems and convert thousands of properties from **septic to sewer**.
- Goal: protect properties, human health, and natural areas such as Biscayne Bay from the risks of septic tank pollution into ground and surface waters.

Miami-Dade County Rules



Miami-Dade County Ordinance 22-83

- On July 7, 2022, the Board of Miami-Dade County Commissioners adopted Ordinance 22-83, which instituted **more rigorous standards** for new and replacement OSTDS.
- **Conventional septic systems (Type 1) are no longer allowed** for new and total replacement
- Property owners **cannot** install or replace septic systems in areas where an approved public gravity sanitary sewer or sanitary sewer force main is available.
- If a septic system fails and a sanitary sewer connection is available, you will **not be permitted to replace or install a new septic system**.
- Property owners in Miami-Dade County should contact the **Florida Department of Health (FDOH)** to register existing septic tanks, contact FDOH at (786) 654-6620 or HRSDOH@flhealth.gov.
- Property owners can also contact **Miami-Dade County Department of Regulatory and Economic Resources (DERM)**, they also maintain records on septic systems. For record inquiries, contact **DERM-DEEM** at (305) 372-6789 or DermRecords@miamidade.gov.
- Property owners **must disclose** if their property is serviced by a septic tank at the point of sale.

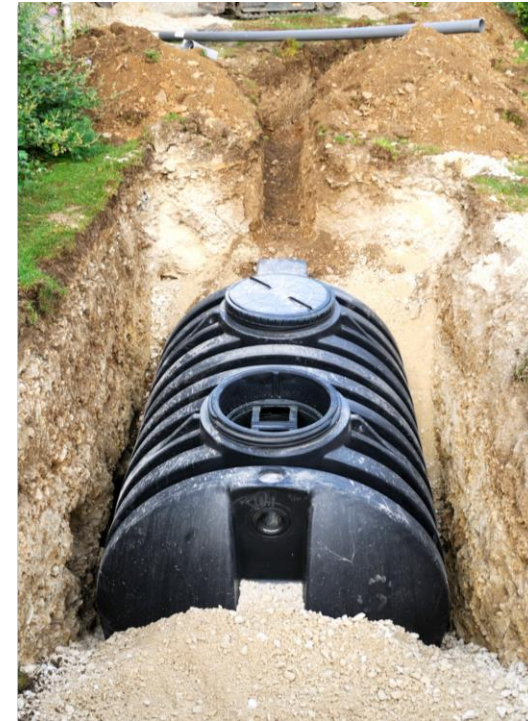

Septic to Sewer Conversion Studies in Florida



Gravity Sewer: BCWWS UAZ
Gravity/Low Pressure Sewer: BCWWS District 3C



Gravity/Low Pressure Sewer: Kennedy Space Center's KARS Park, Merritt Island, FL



Planning Level: Seacoast Utility Authority Low Pressure Sewer Plan



Gravity Sewer: Gardens Subdivision, Rockledge, FL




Low Pressure Sewer: Centralized Wastewater System-Phase II, Taylor County, FL



Low Pressure Sewer: FKAA

Program Overview



Source: Miami-Dade County Connect 2 Protect
miamidade.gov

Reasons for the Project

- Make public sewer available for residents of Coral Gables.
- Mitigate the risk of nutrient and pathogen loading into groundwater and waterways.

*Miami-Dade County Wastewater Treatment Plants remove **90-99%** of total nitrogen from raw wastewater!*

Program Overview



Program Benefits


- No future maintenance costs **for property owners** or costs to repair/replace septic systems. Centralized city-owned sewer system provides increased reliability.
- Enhances property by removing septic systems.
- Reduces pollution discharge into groundwater and waterways, better protecting environmental and human health.



Project Overview

Sewer Basin Areas

- 19 new sewer basin areas are proposed.
- Each basin represents a distinct geographic area within the city, encompassing various neighborhoods and residential zones.
- Basins were ranked and **prioritized for implementation** based on:
 - Proximity to surface water
 - Vulnerability of septic tanks to failure
 - Flood risk
 - Soil drainage
 - Nutrient loading

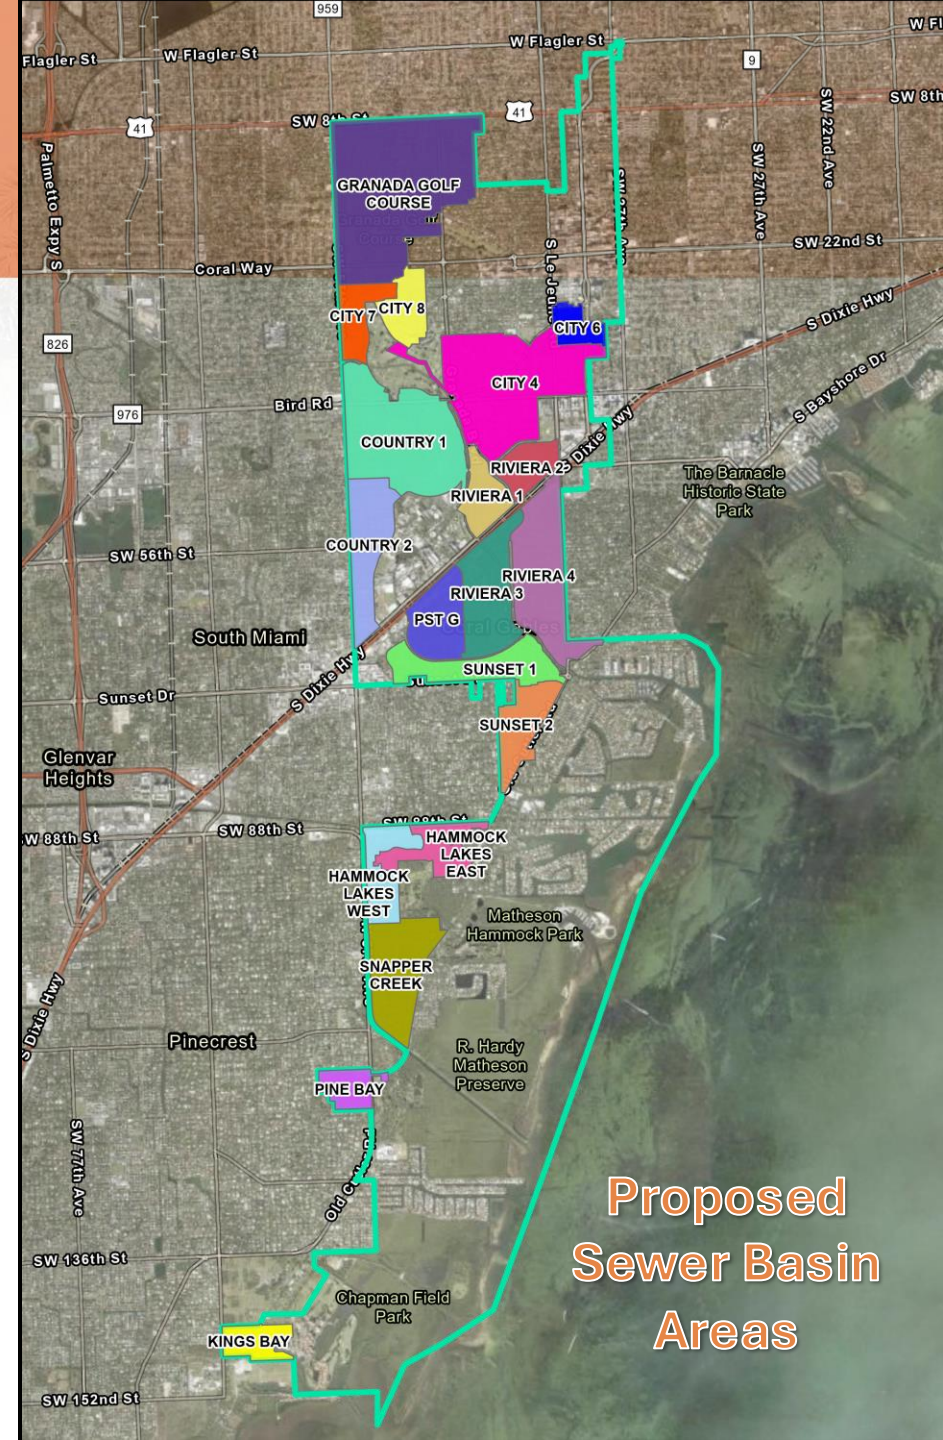

Proposed
Sewer Basin
Areas




Proposed Improvements

Pine Bay Existing Basin





Legend

- PS Exist. Pump Station (City of Coral Gables)
- Exist. Force Main (City of Coral Gables)
- Exist. Basin (City of Coral Gables)
- Extended Basin

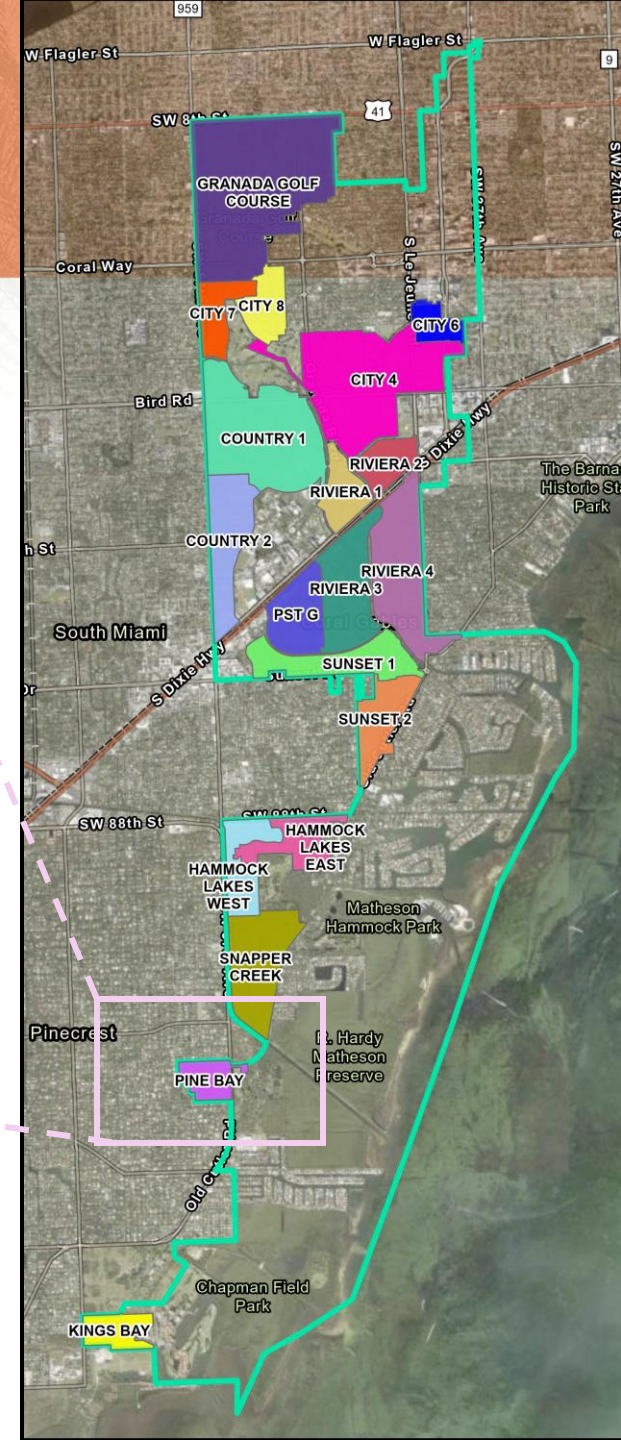

Priority Area: Pine Bay

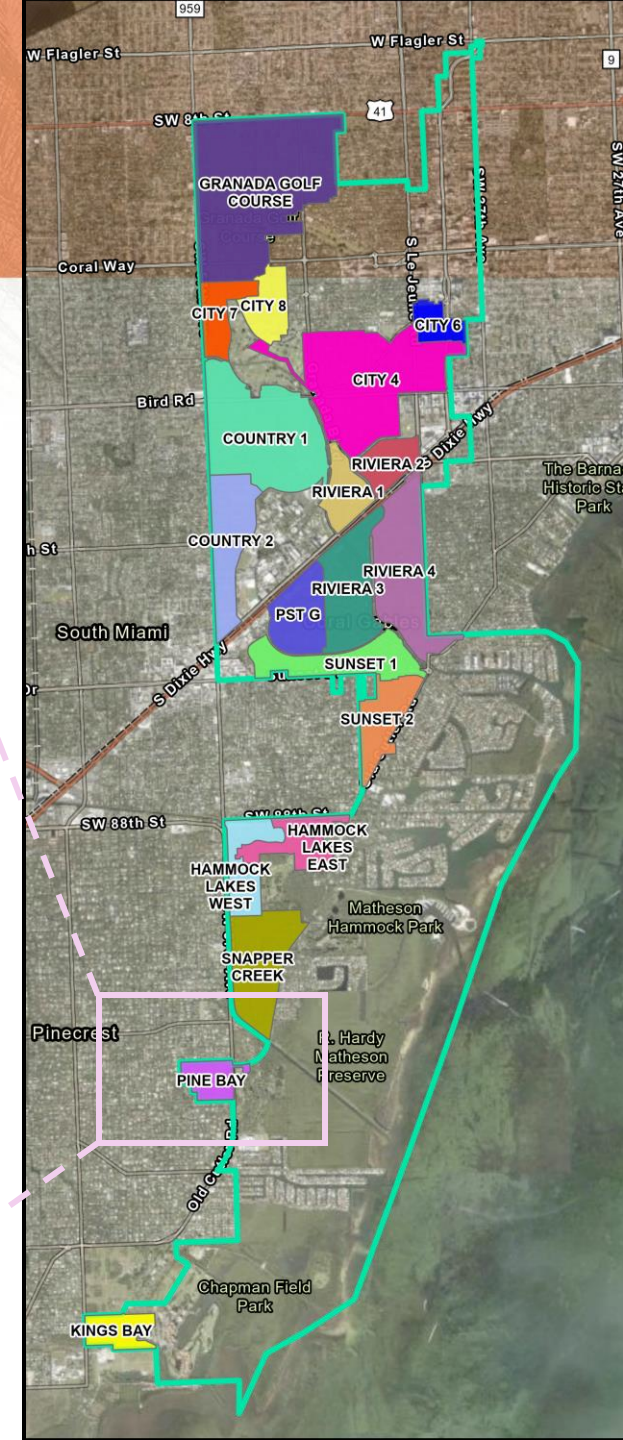
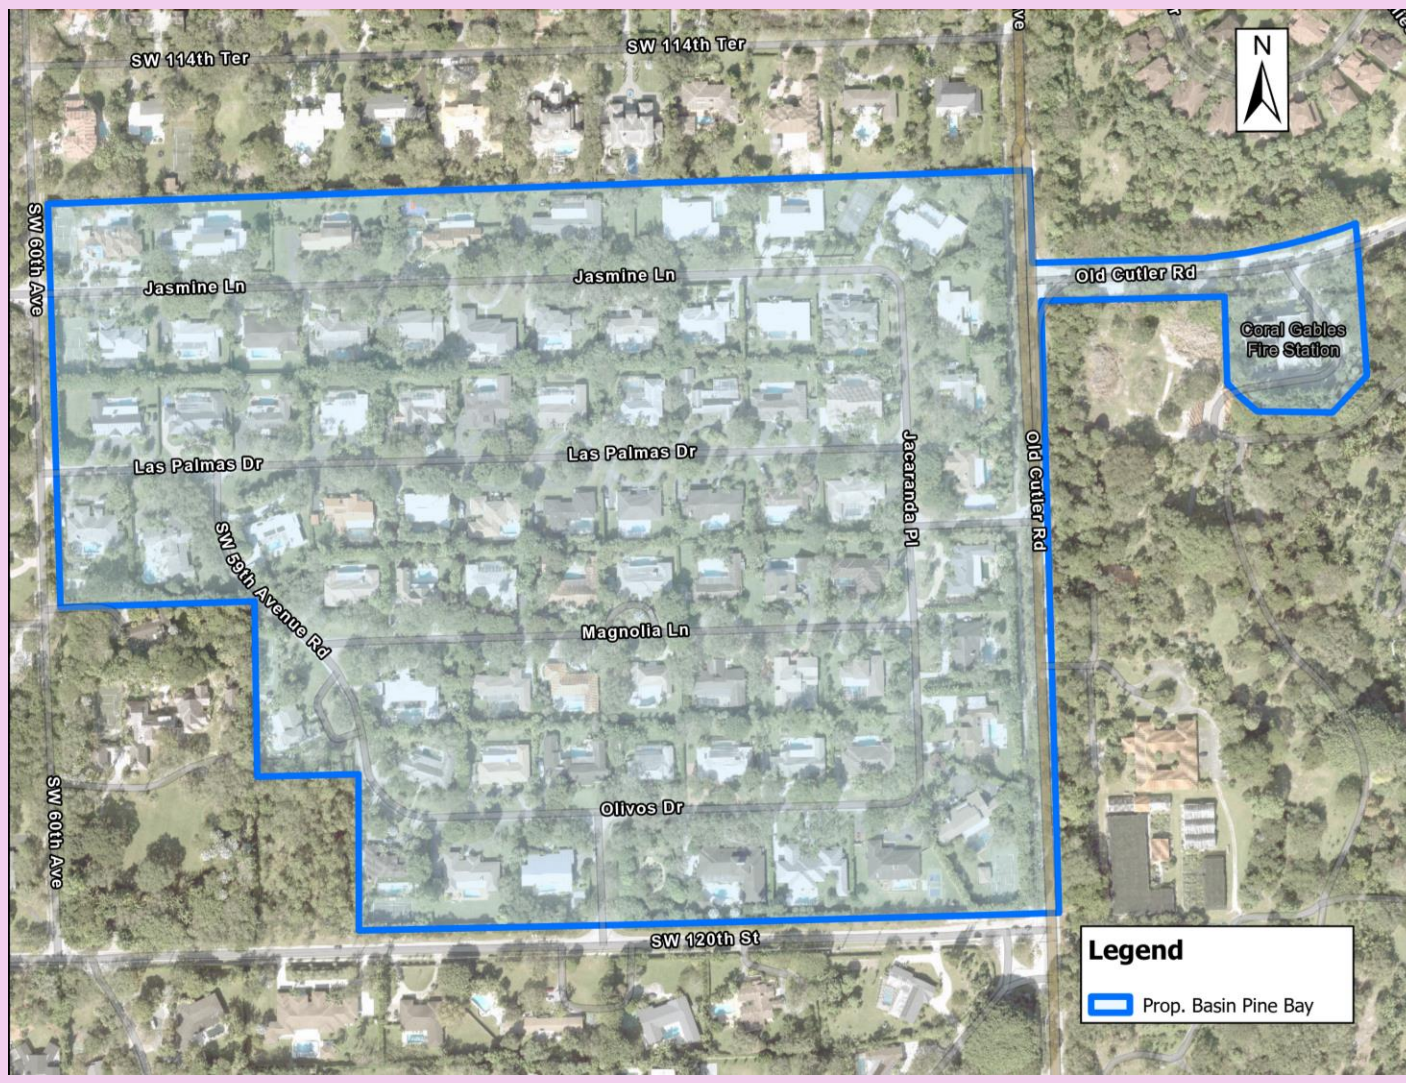


Existing Conditions - Pine Bay

Topography

Legend

Lidar NGVD29

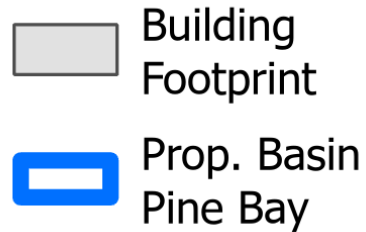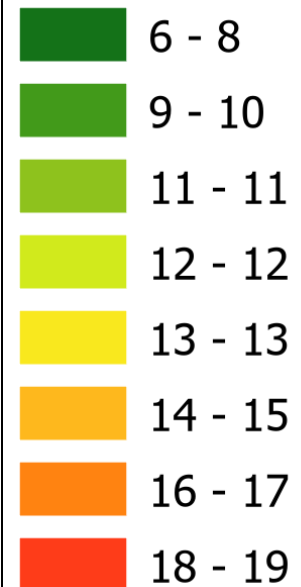



Existing Conditions - Pine Bay

Seasonal High Groundwater


Legend

Groundwater Level
Wet Season 2040

NGVD29

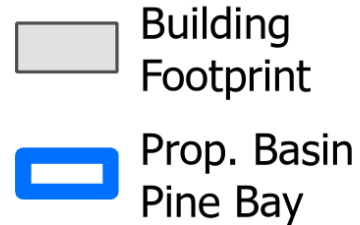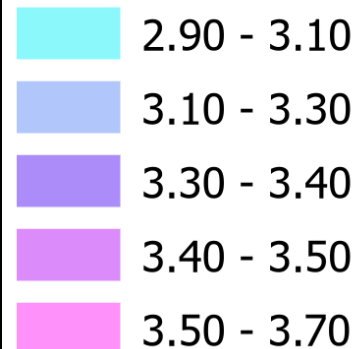

Existing Conditions - Pine Bay



FEMA Flood Map

Legend



Prop. Basin Pine Bay


FEMA Flood Zone



AH



X

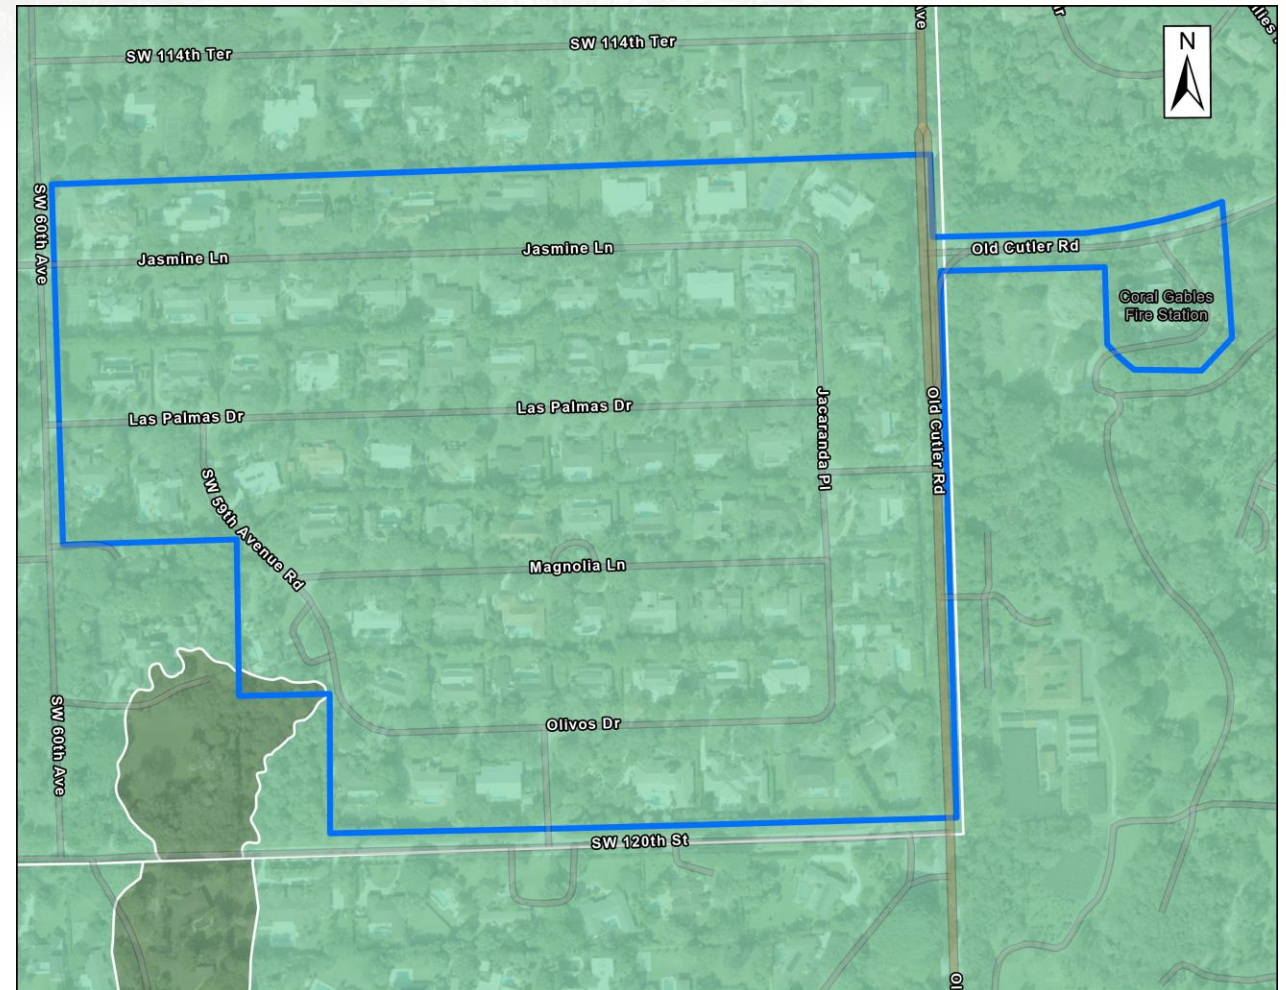




Existing Conditions – Pine Bay

Septic System Inventory

- 1 Fire Station (Miami Dade County)
- 77 Residential – Single Families
 - Total Parcels: **78**
 - Total Parcels connecting to the proposed Gravity System: **77**
 - Total existing properties on Septic Tanks: **77**

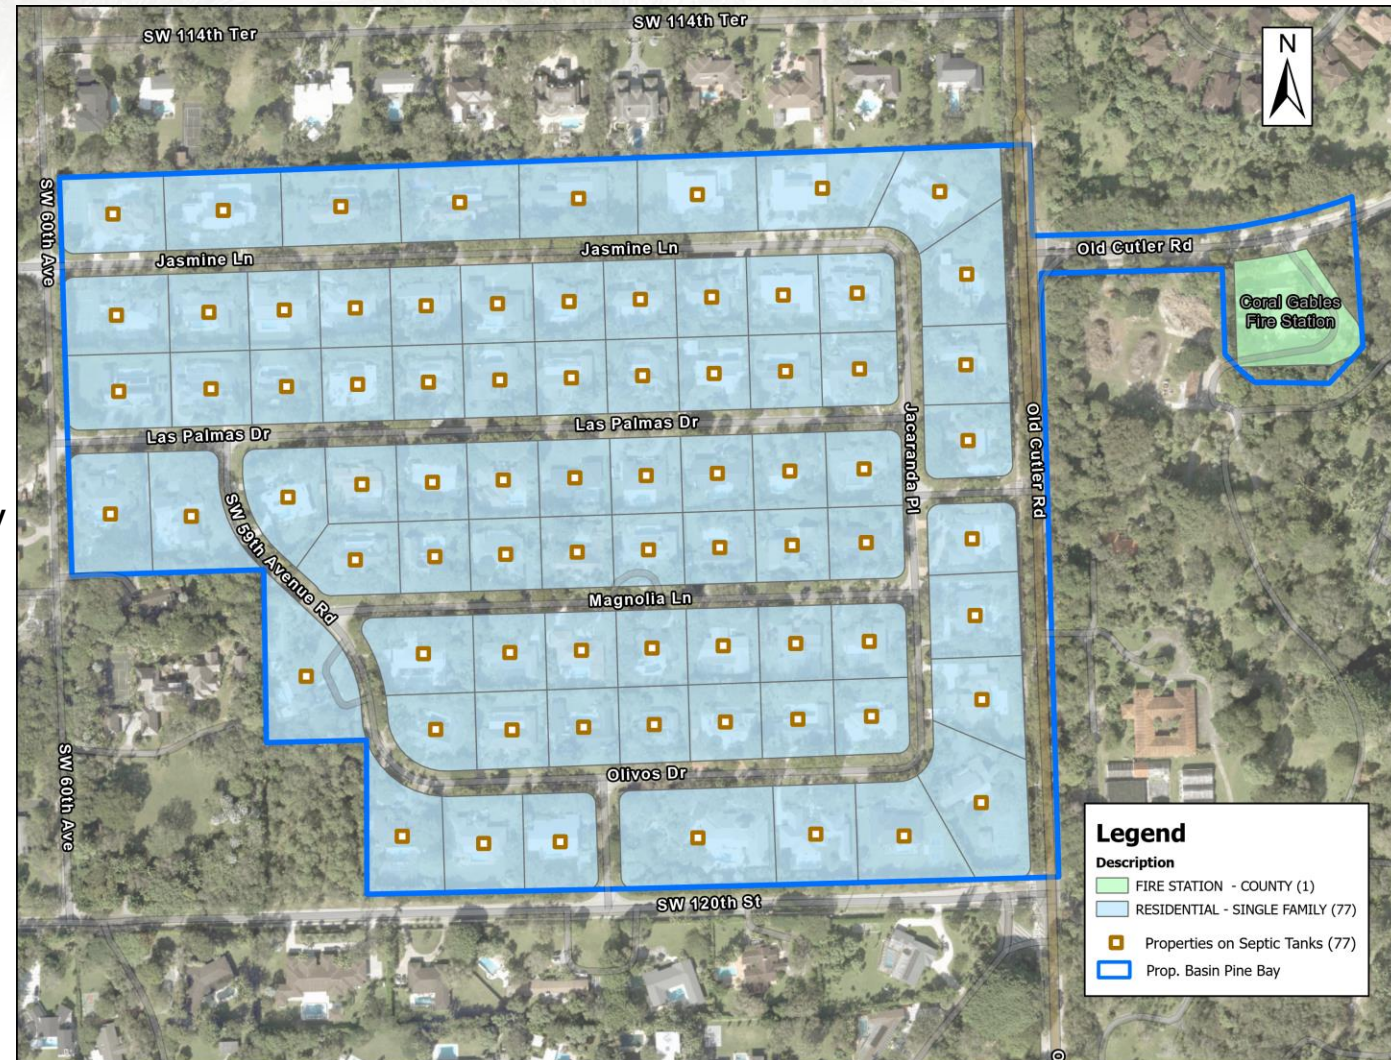




Proposed Improvements – Pine Bay

Scope of Work













- Design and construct a gravity sanitary sewer collection system
- Includes service lateral line in right-of-way for **77** properties
- Design and construct new sanitary sewer pump station and force main
- Roadway resurfacing

TYPE	QUANTITY	UNIT
Manholes	27	EA
Gravity Mains	7,611	LF
Force Main	28	LF
Pump Station	1	EA

Pine Bay – Conceptual Layout





LEGEND

-  Existing Private Pump Station
-  Existing Force Main (City of Coral Gables)
-  Proposed 6-inch Force Main
-  Proposed 8-inch Gravity Main
-  Proposed 10-inch Gravity Main
-  Proposed 12-inch Gravity Main
-  Proposed Manhole
-  Proposed Drop Manhole
-  Proposed Pump Station
-  Proposed Point of Connection
-  Planned Service Properties
-  Proposed Basin




Pine Bay – Pump Station Location

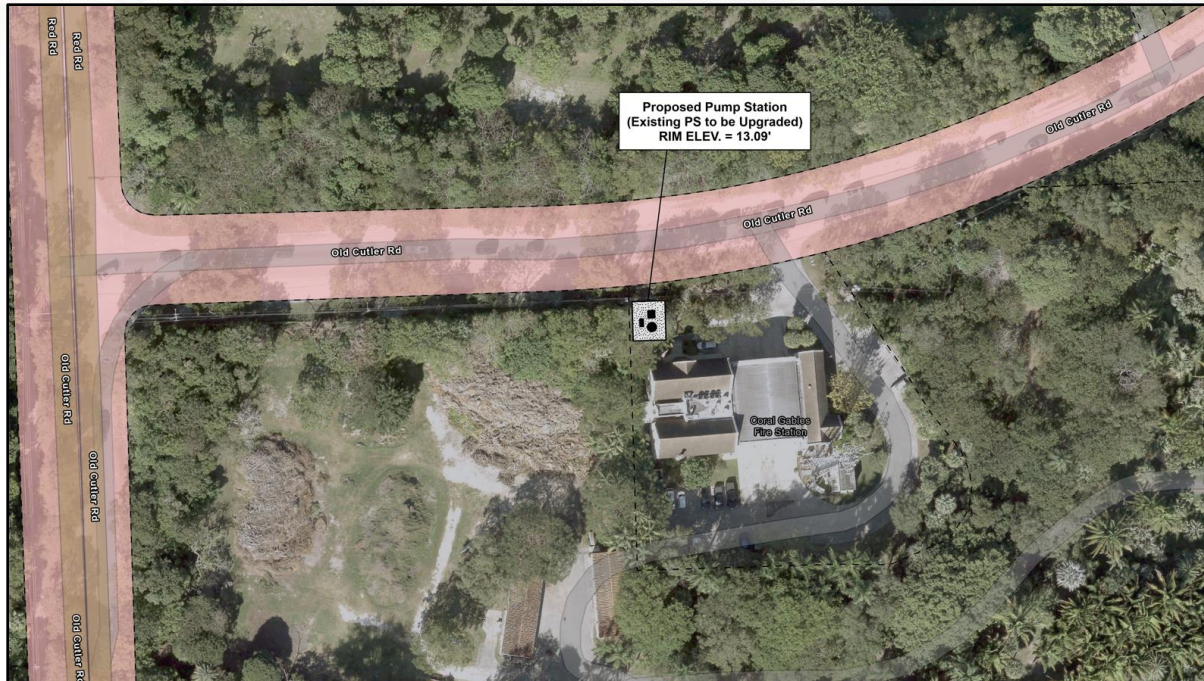


-  Pump Station Location
-  Parcels
-  Right-of-way


- The proposed pump station will be situated at an existing City-owned pump station located at **11911 Old Cutler Road: Fire Station#3.**

Priority Area: Kings Bay

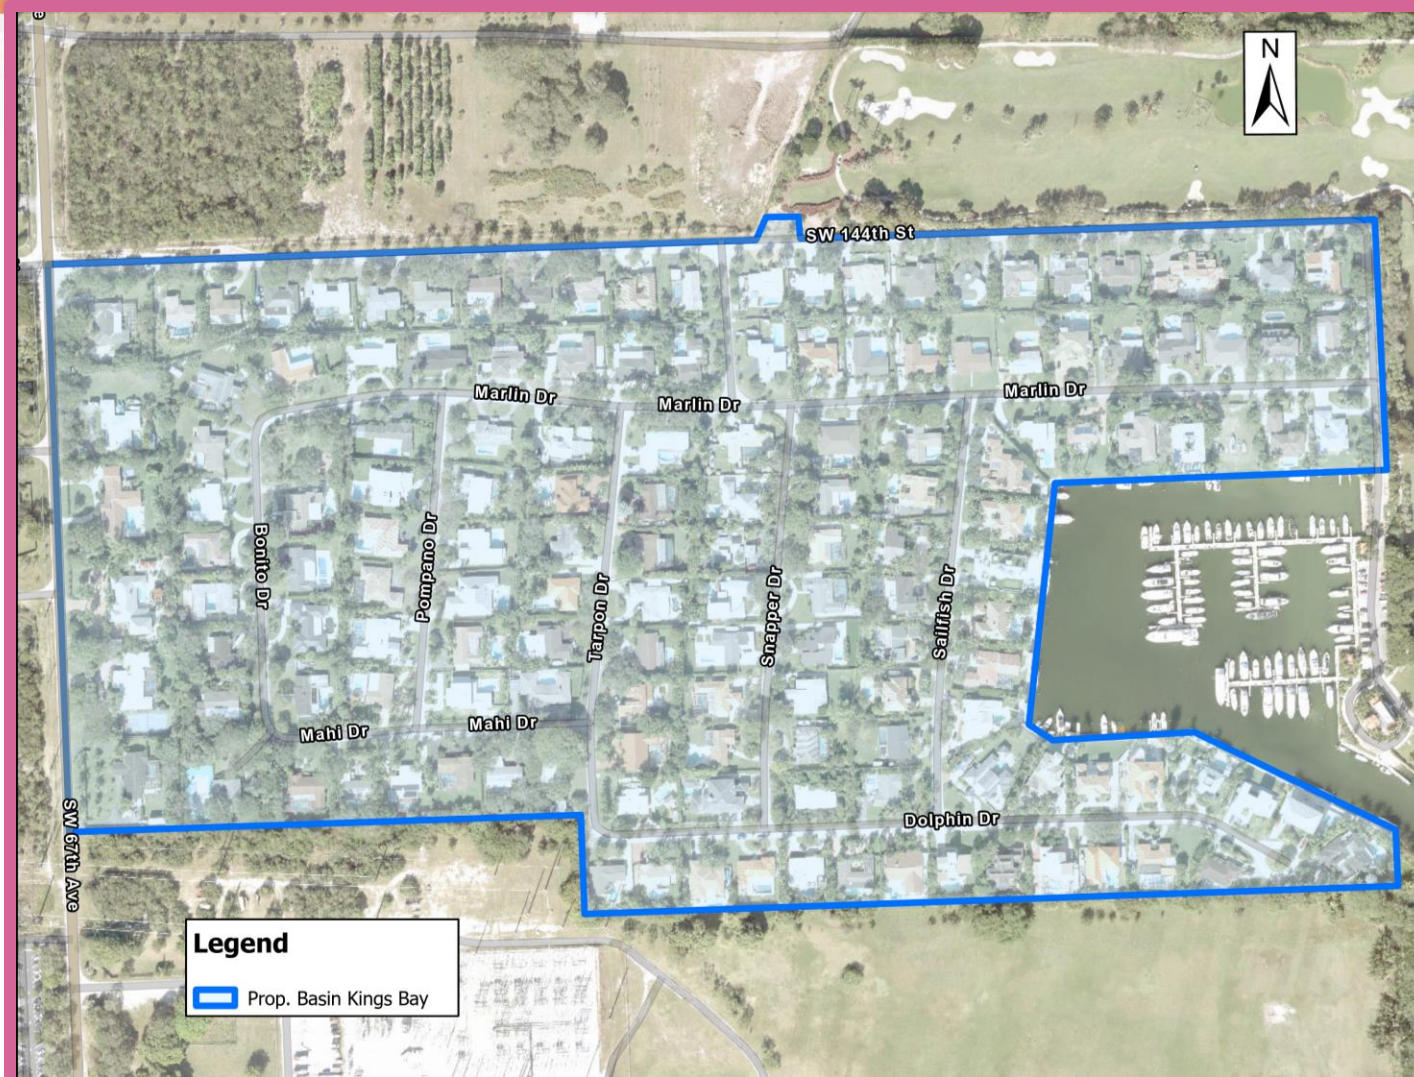

Legend

 Prop. Basin Kings Bay



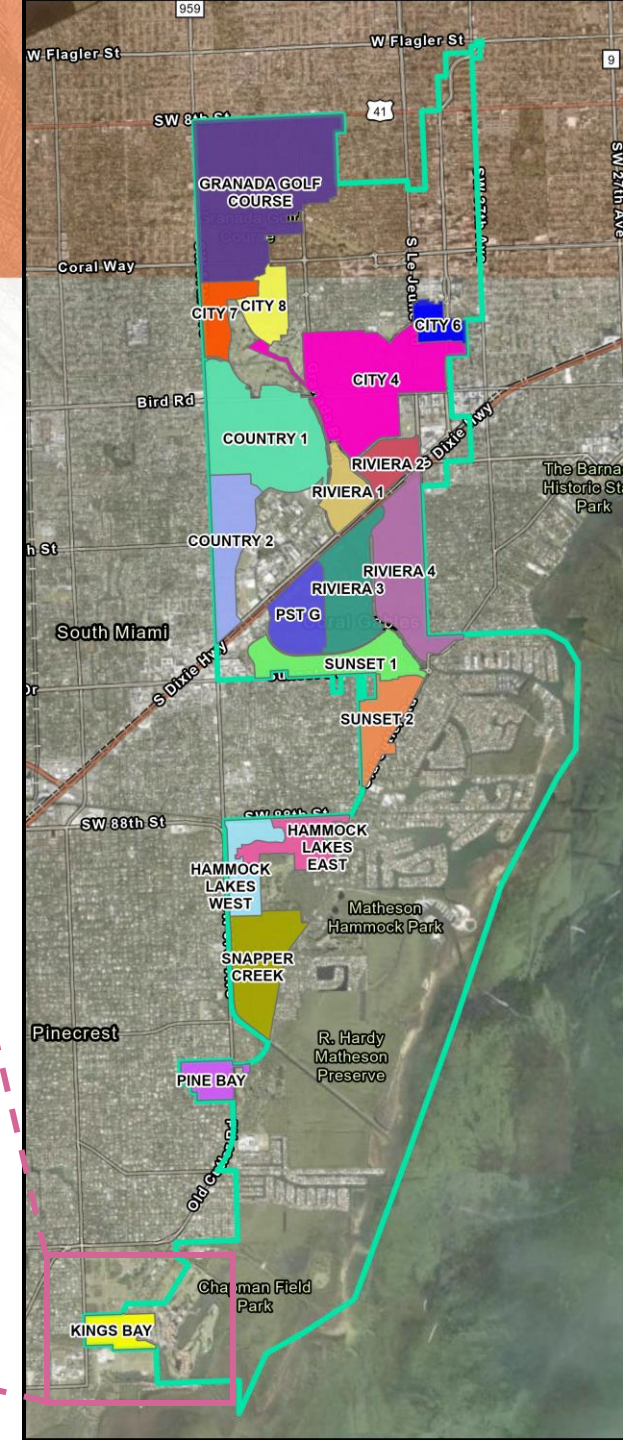


Existing Conditions - Kings Bay

Topography

Legend

Lidar NGVD29

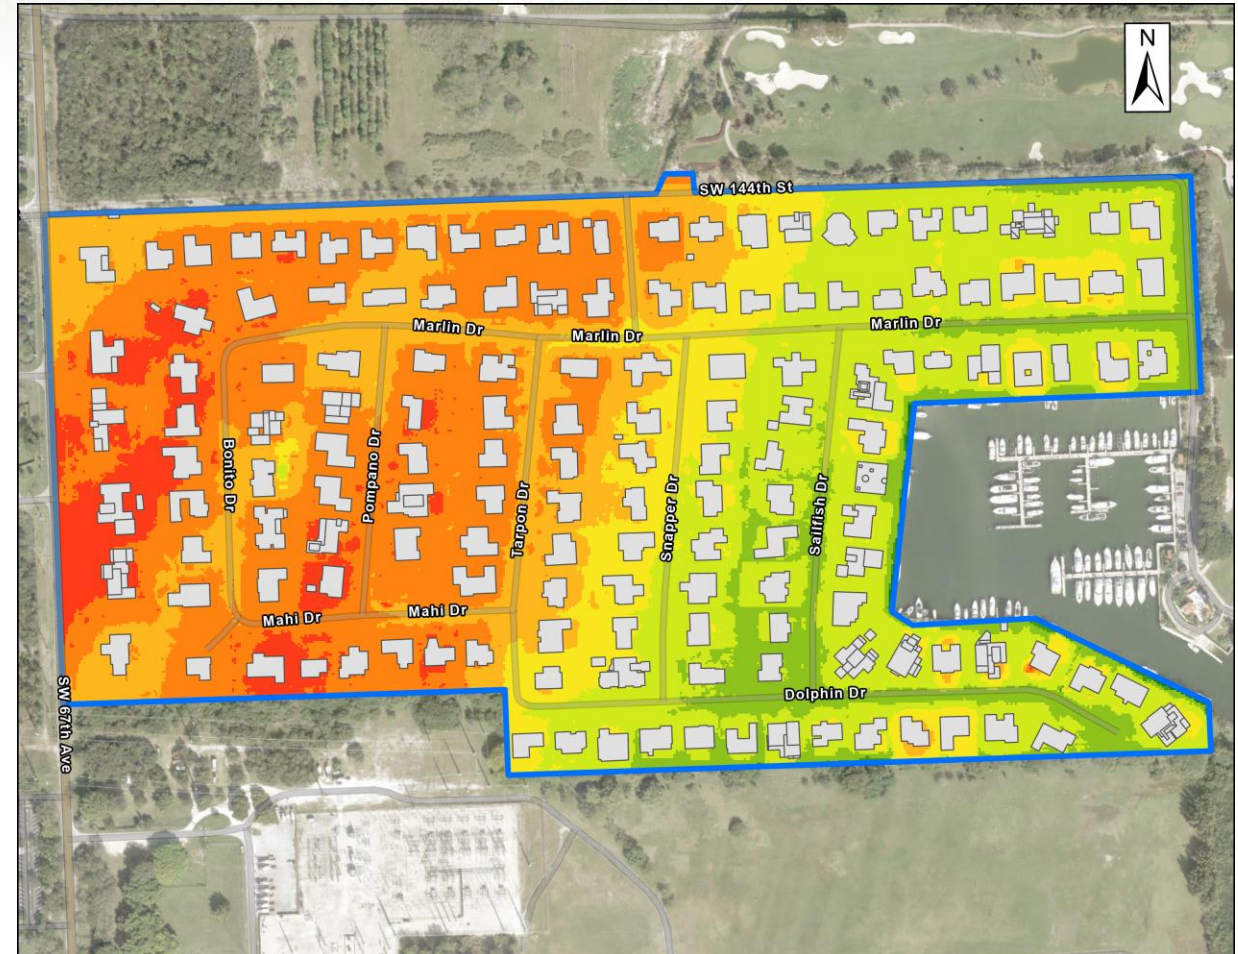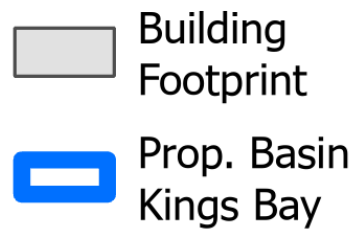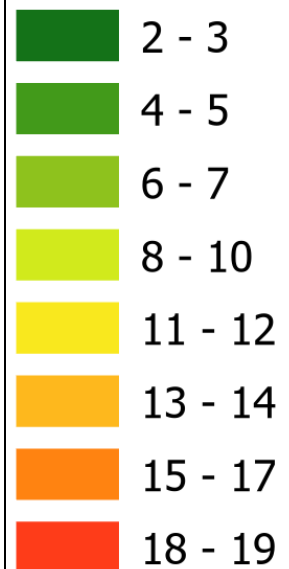






Existing Conditions - Kings Bay



Seasonal High Groundwater


Legend

Groundwater Level
Wet Season 2040


NGVD29

	3.60 - 3.66
	3.66 - 3.70
	3.70 - 3.73
	3.73 - 3.75
	3.75 - 3.78

-  Building Footprint
-  Prop. Basin Kings Bay

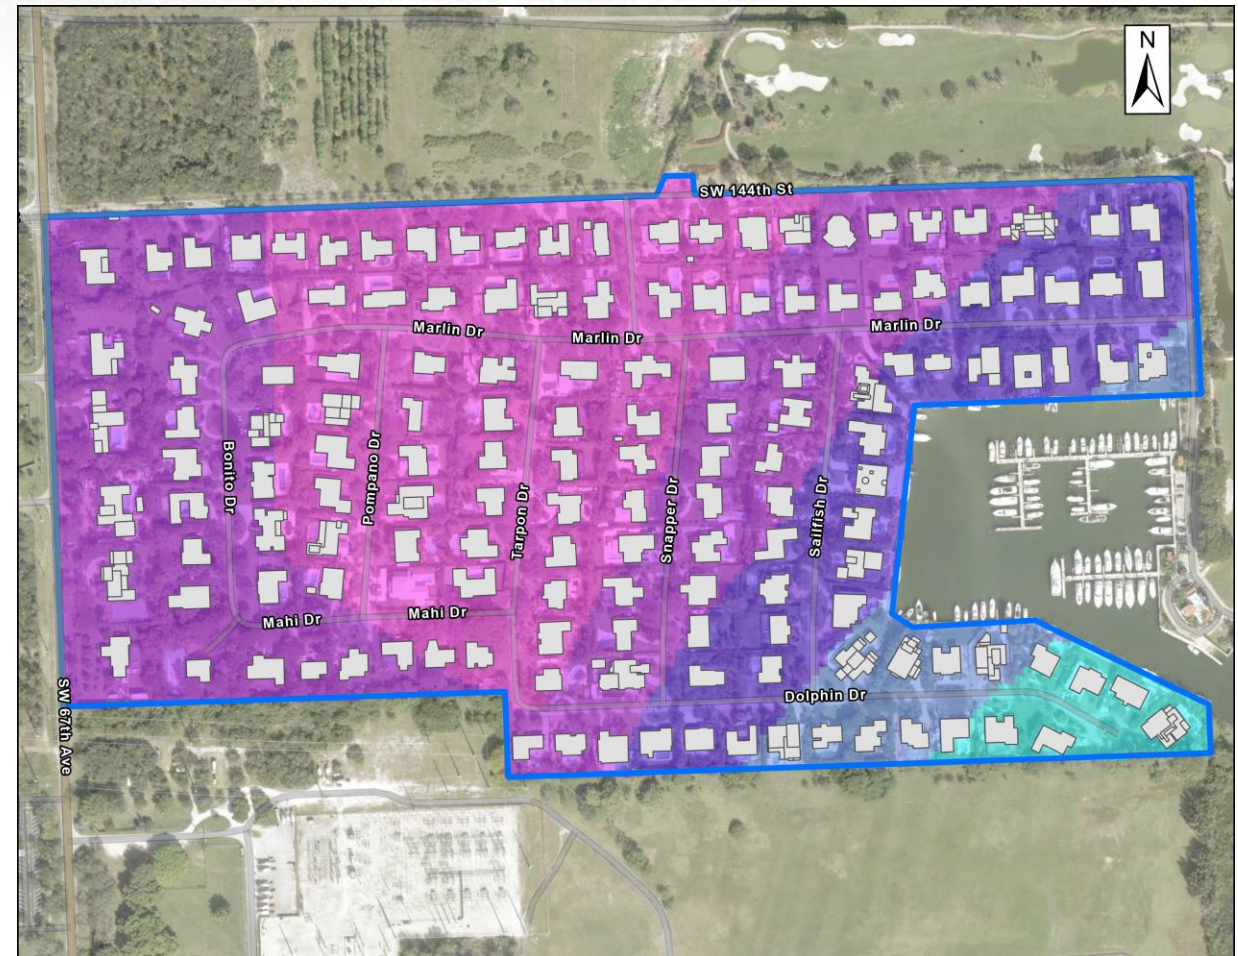

Existing Conditions - Kings Bay



FEMA Flood Map


Legend

 Prop. Basin Kings Bay

FEMA Flood Zone

 AE


 X

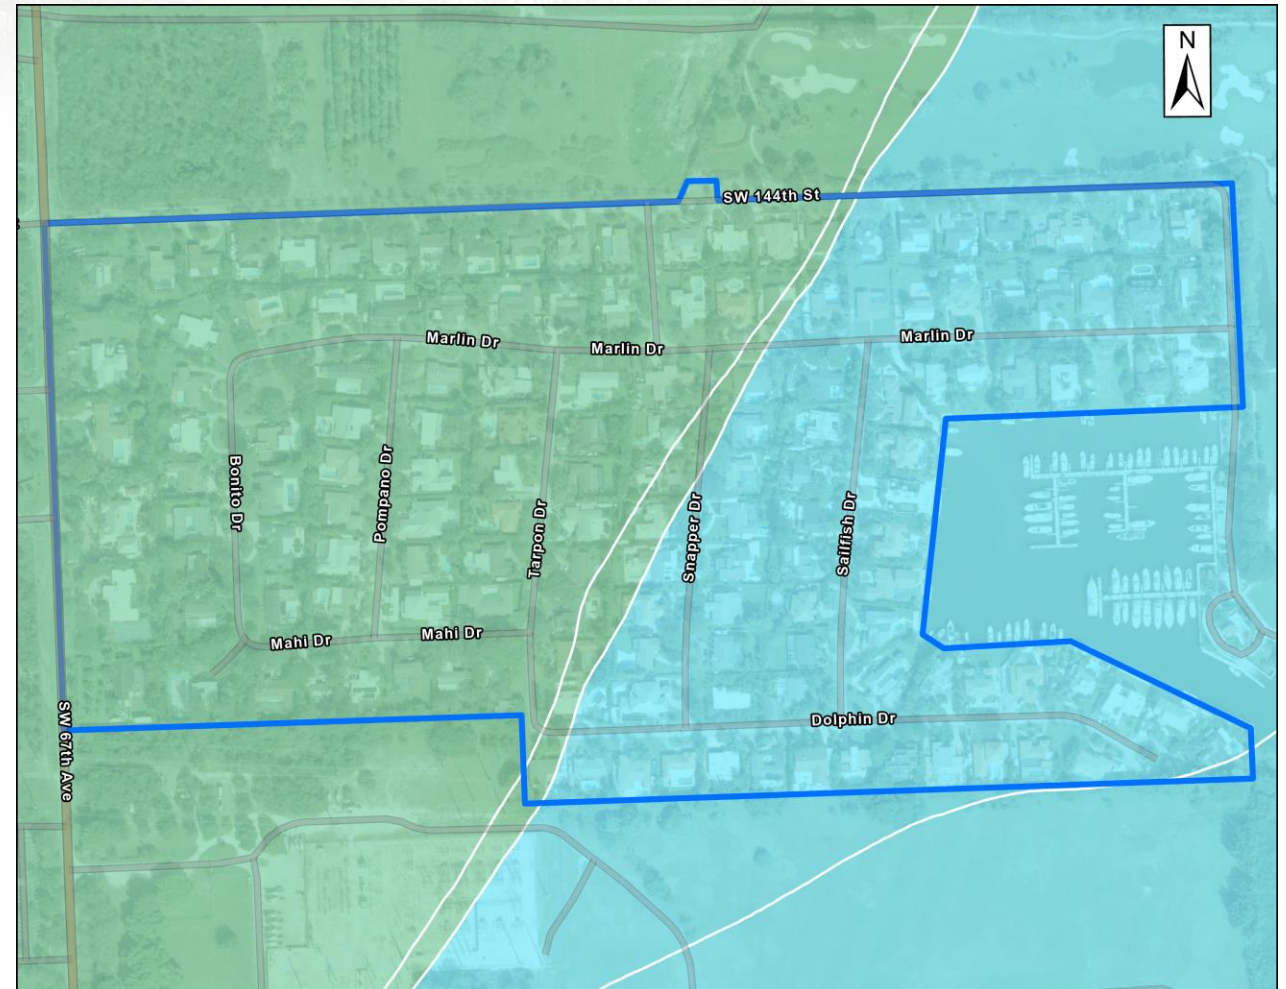

Existing Conditions – Kings Bay

Septic System Inventory

- 148 Residential – Single Families
- 1 Governmental Vacant Lots (City of Coral Gables)
- 1 Vacant Lots (Residential)
- Total Parcels: **150**
- Total Parcels connecting to the proposed Gravity System: **150**
- Total existing properties on Septic Tanks: **148**

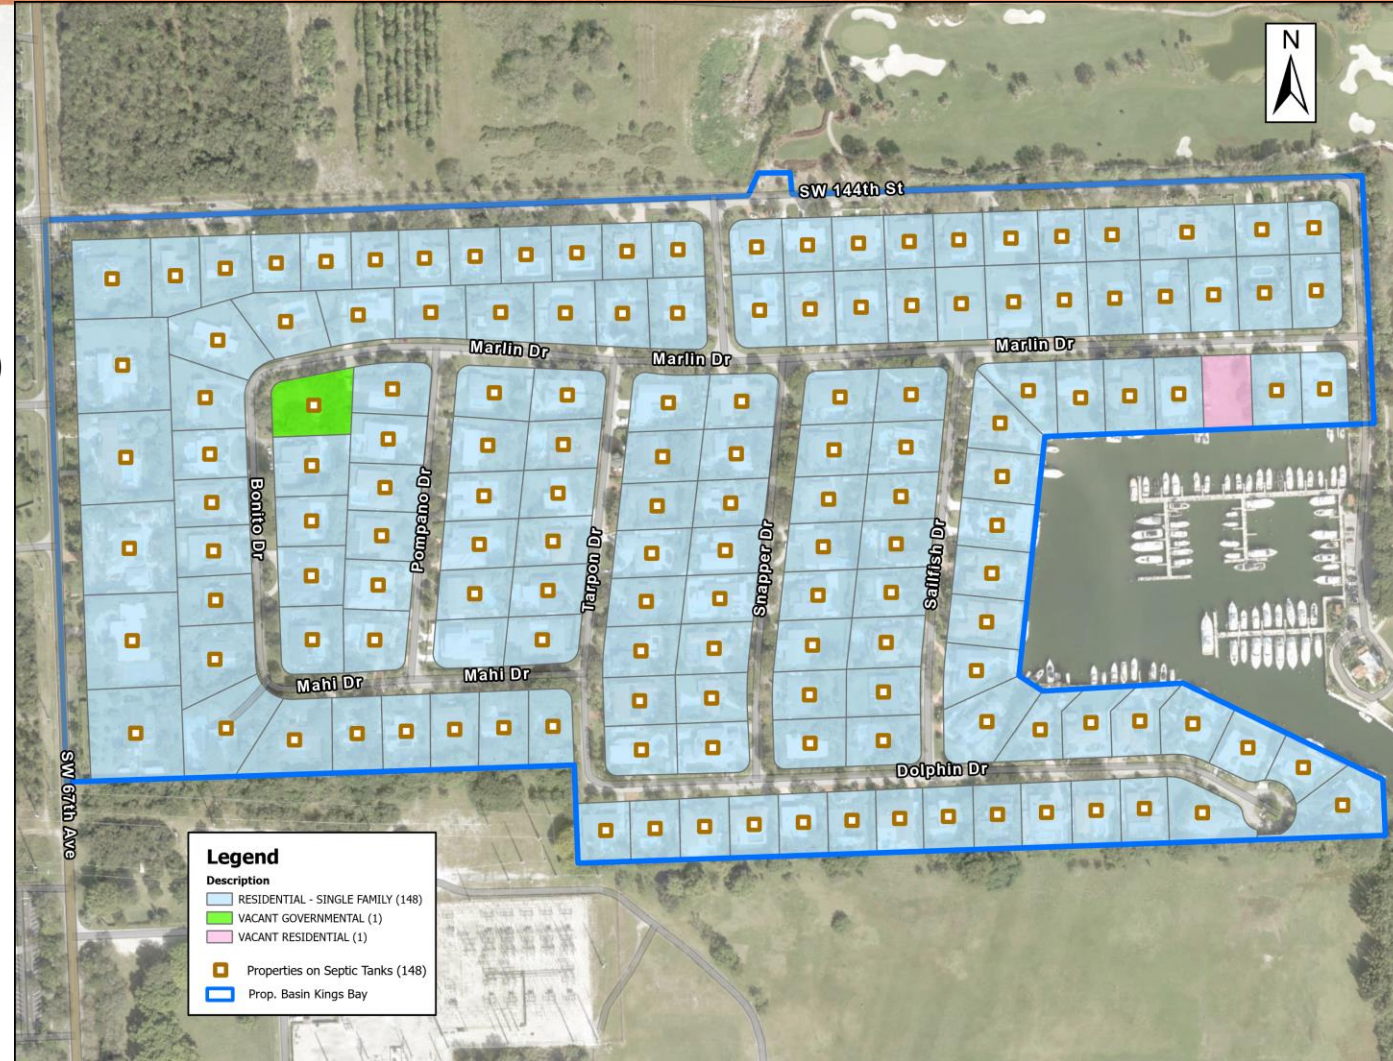




Proposed Improvements – Kings Bay

Scope of Work













- Design and construct a gravity sanitary sewer collection system
- Includes service lateral line in right-of-way for **150** properties
- Design and construct new sanitary sewer pump station and force main
- Roadway resurfacing


TYPE	QUANTITY	UNIT
Manholes	43	EA
Gravity Mains	11,704	LF
Force Main	16	LF
Pump Station	1	EA

Kings Bay – Conceptual Layout





LEGEND

-  Existing Private Pump Station
-  Existing Force Main (City of Coral Gables)
-  Proposed 6-inch Force Main
-  Proposed 8-inch Gravity Main
-  Proposed 10-inch Gravity Main
-  Proposed 12-inch Gravity Main
-  Proposed Manhole
-  Proposed Drop Manhole
-  Proposed Pump Station
-  Proposed Point of Connection
-  Planned Service Properties
-  Proposed Basin

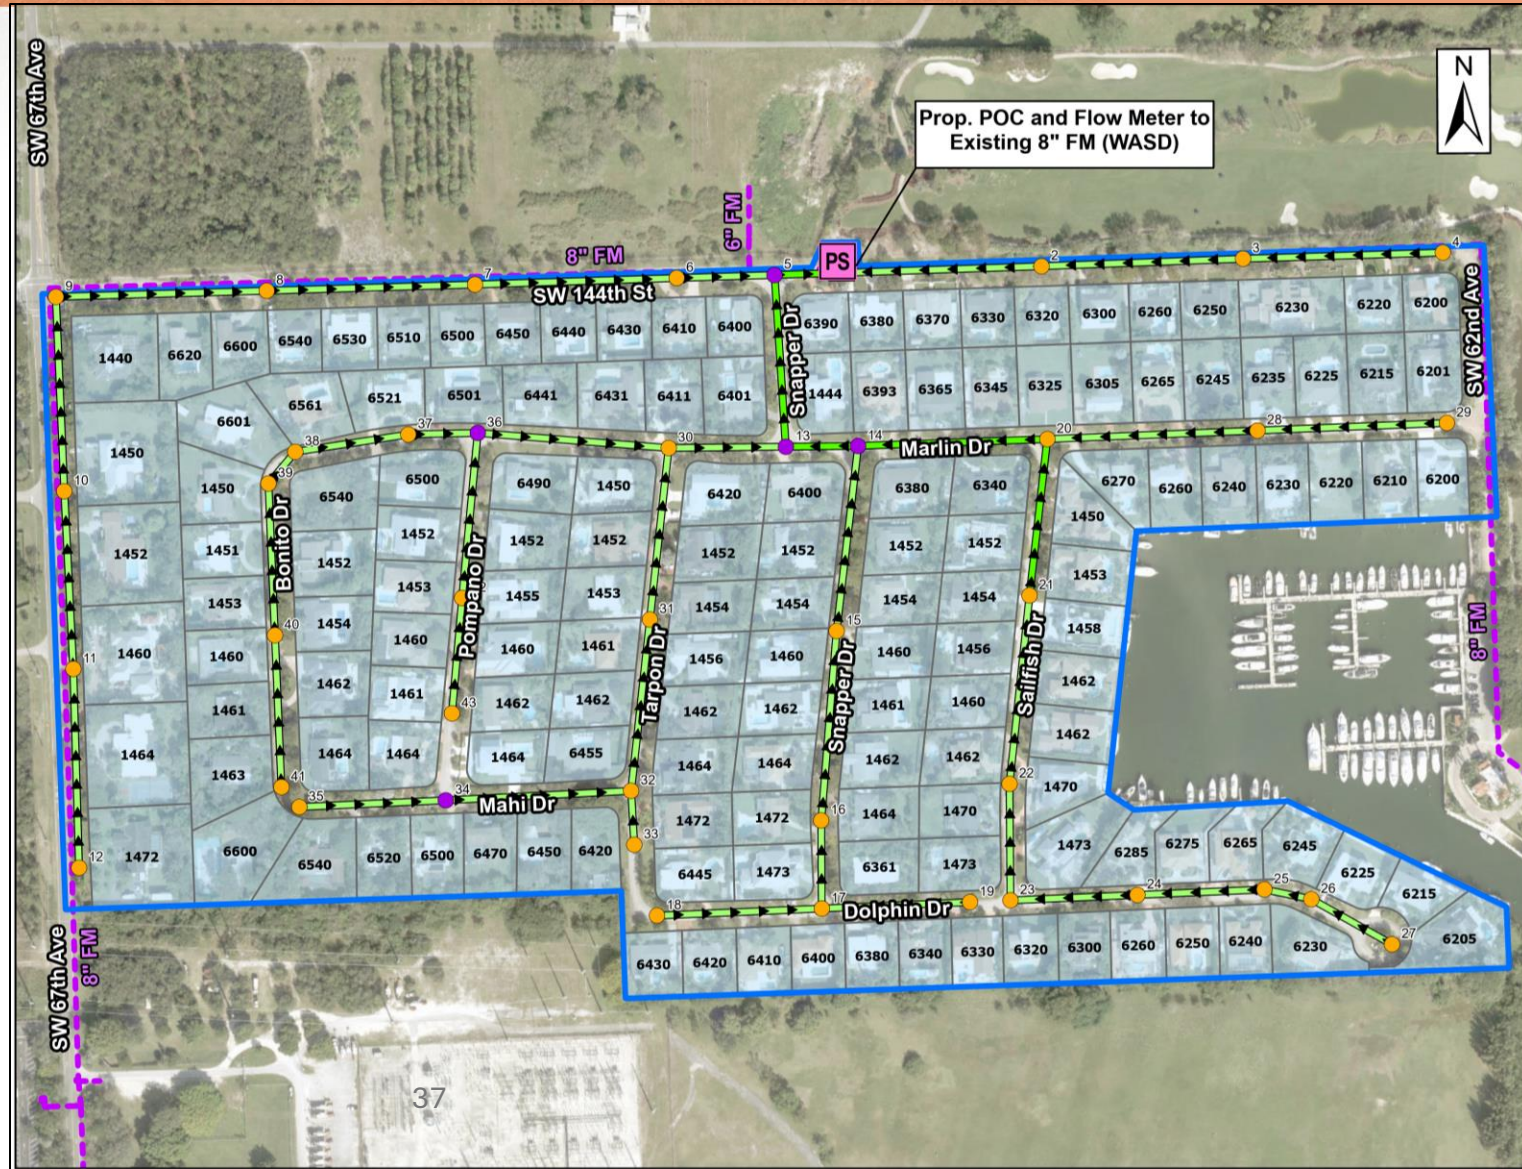

Kings Bay – Pump Station Location

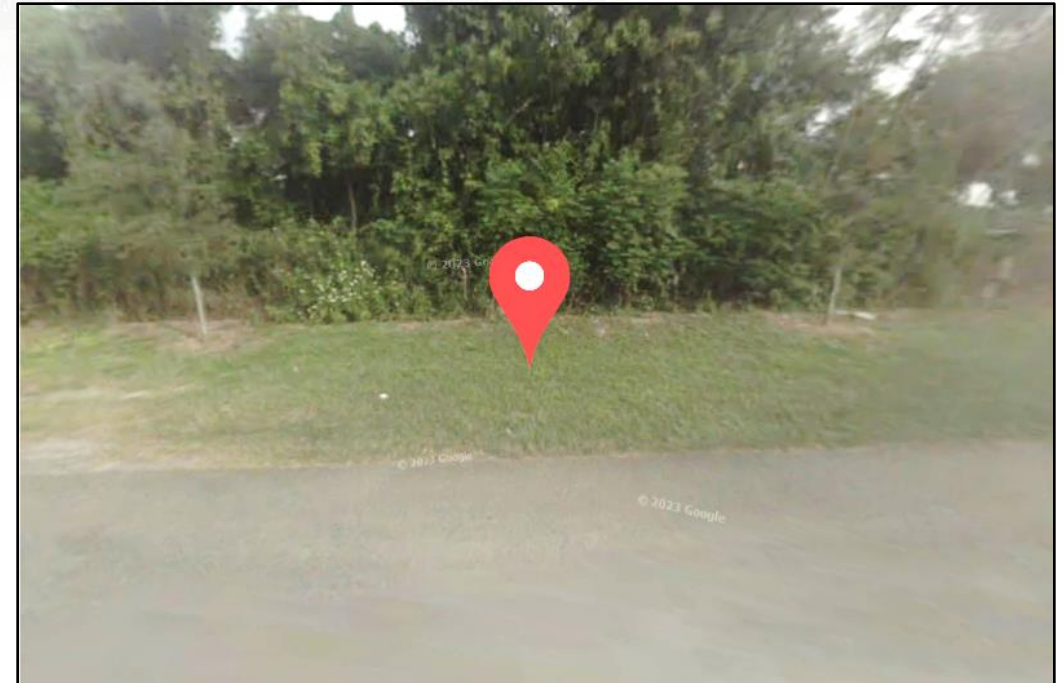


- The proposed PS is located along **SW 144th ST** within a City owned ROW. The pump station footprint may require an additional easement from the adjacent property: **Deering Bay Yacht & Country Club**.



Costs & Funding

Cost Information on Enhanced Nutrient Removal OSTD



The cost to replace a traditional septic tank with an **Enhanced Nutrient Removal (ENR) Onsite Sewage Treatment and Disposal (OSTD)** system could exceed **\$65,000** (in today's dollars) or more. Several factors can contribute to greater associated costs:

Complex site conditions

If the soil is poor, there's limited space, or the ground is difficult to work with (e.g., rocky or unstable), extra excavation or engineering work may be needed.

Upgraded system design

Larger or more advanced ENR systems (such as those that handle high flows or larger homes) can be more expensive.



Specialized permits or regulations

Increased local permitting requirements & environmental regulations.



Higher Maintenance Costs

Compared to conventional septic systems, ENR systems require more frequent maintenance and monitoring, leading to higher long-term costs.



Disposal of old system

If the traditional septic tank needs to be removed and disposed of properly, this could add to the cost.



Estimated Costs and Funding

Pine Bay (New Basin)

- Preliminary Rough Order of Magnitude Cost Estimate:
 - *Total Cost for Basin:* **\$6.61 M**
 - *Number of Parcels:* **77**
 - *Cost per Parcel:* **\$85.8K**

Kings Bay (New Basin)

- Preliminary Rough Order of Magnitude Cost Estimate:
 - *Total Cost for Basin:* **\$8.5 M**
 - *Number of Parcels:* **150**
 - *Cost per Parcel:* **\$56.7K**

* Please note that all estimated costs are based on current dollars and are subject to change due to inflation, material costs, labor rates, and other economic factors. Final costs may vary depending on the timeline of each project.





Estimated Costs and Funding

Estimated Costs within Private Property

- Homeowner Cost Estimate Per Property*:
 - Sewer Capacity Certification: \$200
 - Miami-Dade WASD Impact Fees: \$1,800
 - FDOH Septic Abandonment Fee: \$100
 - Pump and Abandon Tank: \$2,500
 - Private Lateral and Plumbing Re-Route: \$12,000
 - TOTAL: **\$16,600**

* Costs to abandon septic and connect to sewer.

* Assuming septic systems are located at the back of the property and plumbing re-route needed to connect at the front of the property.

* Costs may vary per specific property conditions.



Estimated Costs and Funding



Potential Funding Assistance for Homeowners

- Grant program to assist with assessment and private connection costs
 - Contingent on receiving state or federal funding.
 - Establish qualification criteria, for example:
 - Income levels
 - Scope and cost of project
 - Property in good standing with the City
- Solar Energy Loan Fund (SELF) Home Improvement Loan
- Clean Water State Revolving Fund



Estimated Costs and Funding

Possible Repayment Options for Pine Bay Assessment

- **Pay upfront** – No financing or interest charges – Approximately **\$85,845**
- **Pay off at any time** – Incur financing cost but only incur interest charges up to the time of pay off
- **Pay over life of loan** – Incur financing and interest costs each year (estimate):
 - **5 year - 4.00% Int.** \$19,285 per year - \$ 96,425 total
 - **7 year - 4.25% Int.** \$14,435 per year - \$101,045 total
 - **10 year - 4.50% Int.** \$10,850 per year - \$108,500 total
 - **15 year - 4.75% Int.** \$ 8,132 per year - \$121,980 total
 - **20 year - 5.00% Int.** \$ 6,889 per year - \$137,780 total
 - **25 year - 5.25% Int.** \$ 6,245 per year - \$156,125 total

Note: Interest rates listed above are for illustrative purposes only and should not be relied on. They are subject to change based on market conditions at the time the loan/bonds are issued.




Estimated Costs and Funding

Possible Repayment Options for Kings Bay Assessment


- **Pay upfront** – No financing or interest charges – Approximately **\$56,700**
- **Pay off at any time** – Incur financing cost but only incur interest charges up to the time of pay off
- **Pay over life of loan** – Incur financing and interest costs each year (estimate):
 - **5 year - 4.00% Int.** \$12,740 per year - \$ 63,700 total
 - **7 year - 4.25% Int.** \$ 9,535 per year - \$ 66,745 total
 - **10 year - 4.50% Int.** \$ 7,165 per year - \$ 71,650 total
 - **15 year - 4.75% Int.** \$ 5,370 per year - \$ 80,550 total
 - **20 year - 5.00% Int.** \$ 4,550 per year - \$ 91,000 total
 - **25 year - 5.25% Int.** \$ 4,125 per year - \$103,125 total

Note: Interest rates listed above are for illustrative purposes only and should not be relied on. They are subject to change based on market conditions at the time the loan/bonds are issued.


Resources for Homeowners



- **Miami-Dade County Septic System Care:**
 - Provides homeowner guidance on septic system maintenance and best practices.
 - www.miamidade.gov/global/economy/environment/septic-system-care.page
- **Miami-Dade County iWASD Connect GIS Viewer:**
 - Helps users locate utility service areas and plan for connections or upgrades.
 - gisweb.miamidade.gov/iWASDConnect/
- **Miami Waterkeeper:**
 - Highlights the impact of septic failures on water quality and promotes sustainable wastewater solutions through advocacy and education.
 - www.miamiwaterkeeper.org/septic

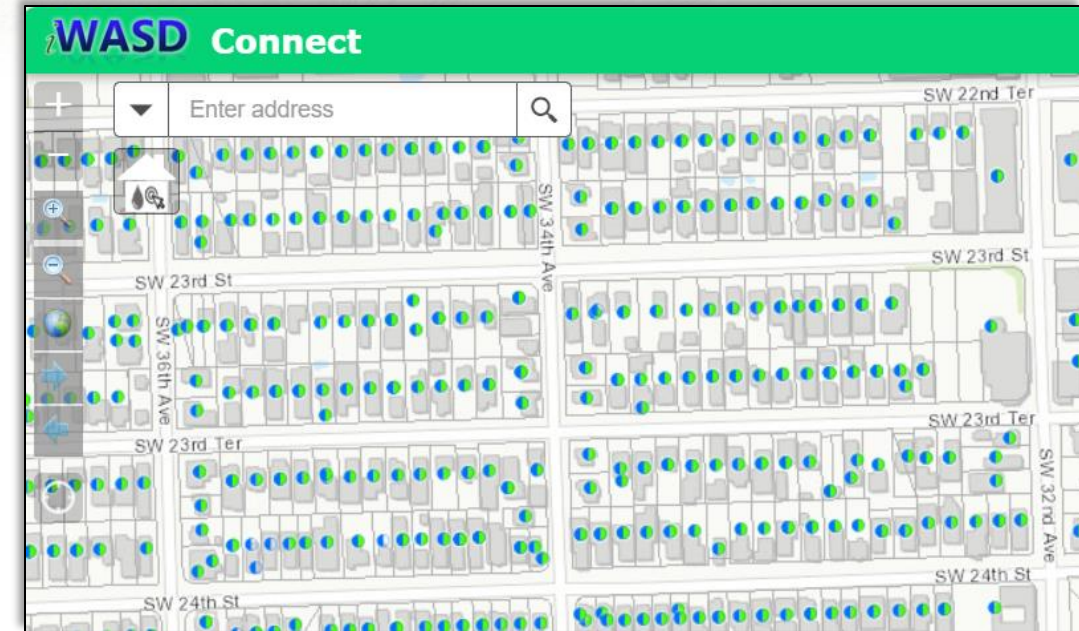

Stay Updated & Get Involved



septictosewer@coralgables.com



City of Coral Gables Public Works Department
305-460-5000



[Coral Gables | Septic to Sewer Program Website](#)

Public Survey



PLEASE SCAN QR CODE TO COMPLETE SURVEY



CITY OF CORAL GABLES

COMPREHENSIVE CITYWIDE SEPTIC TO SEWER CONVERSION PLAN

Q&A